

Project Name:  Type:  Quantity:

## INTENDED USE

The specification grade 15204 is the ideal solution for warehouse, gymnasium, or other mid to high-ceiling applications where high output LED lighting is desired.

## FEATURES

**Construction:** .064" thick spun aluminum cylinder supplied with aluminum and polycarbonate reflector options

**Mounting:** Includes 3/8" IP x 12" rigid stem and 45° swivel canopy. Adjustable aircraft cable with either straight or coiled cords, hard stem which can accommodate sloped ceilings with a 45° swivel

**Refactor:** Prismatic refractor provides excellent efficiency, upright component gives the illuminated space lower contrast and better uniformity  
 Polycarbonate refractor provides more rugged performance in an abusive environment. Aluminum heavy gauge, high purity, spun aluminum. Polyester powder-coat finish

**CRI:** 80+ Standard, 90+ Optional

**Voltage:** 120-277V

**Driver:** 0-10V down to 1% Internal, TRIAC down to 20% Optional

**Life:** 50,000 hours at L70 standard.

**Listings:** UL, ETL, CSA, Suitable for Damp Locations. Wet location under covered ceiling

**Warranty:** 5 years carefree for parts & components (labor not included)



Flat Clear Lens (Optional)



Conical Lens (Optional)



Alcon Lighting 15204 Architectural Round Low Bay Pendant Fixture



**ORDERING INFORMATION Example:**

<b>MODEL</b>		<b>15204</b>		
<b>DIAMETER</b>		<b>12</b> 12" Dia.	<b>16</b> 16" Dia.	
<b>LUMENS</b>		<b>11L</b> 1100	<b>20L</b> 2000	<b>40L</b> 4000
		<b>15L</b> 1500	<b>30L</b> 3000	<b>50L</b> 5000
<b>COLOR TEMP</b>		<b>27K</b> 2700K	<b>35K</b> 3500K	
		<b>30K</b> 3000K	<b>40K</b> 4000K	
<b>CRI</b>		<b>(Blank)</b> 80+	<b>9</b> 90+	
<b>SHADE</b>		<b>AL</b> <sup>1</sup> Aluminum	<b>PL</b> Polycarbonate	
<b>HOUSING FINISH</b>		<b>WH</b> White	<b>BZ</b> Bronze	<b>RAL#</b> Specify RAL # (Pg. 4)
		<b>BK</b> Black	<b>SL</b> Silver	
<b>MOUNTING</b>		<b>AC6</b> 6' Aircraft Cable	<b>ST1</b> <sup>Std</sup> 1' Stem	<b>CAC4</b> 4' Coiled Cord
		<b>AC10</b> 10' Aircraft Cable	<b>ST2</b> 2' Stem	<b>CAC6</b> 6' Coiled Cord
		<b>AC15</b> 15' Aircraft Cable	<b>ST3</b> 3' Stem	<b>CAC10</b> 10' Coiled Cord
		<b>AC20</b> 20' Aircraft Cable	<b>STxx</b> Specify X in Feet (Max 12')	
<b>MOUNTING FINISH</b>		<b>WH</b> White	<b>BZ</b> <sup>3</sup> Bronze	<b>CC</b> Custom
		<b>BK</b> Black	<b>SL</b> <sup>4</sup> Silver	
<b>BOTTOM LENS</b> <sup>7</sup>		<b>(Blank)</b> Open	<b>FL</b> Flat Clear Lens	<b>CL</b> Conical Lens
<b>DIMMING</b>		<b>(Blank)</b> <sup>Std,2</sup> 0-10V Dim to 1%	<b>TRI</b> Triac Dim to 20%	
<b>OPTIONS</b>		<b>XEM</b> <sup>5</sup> External Emergency Battery Backup		
		<b>SC</b> Safety Cable		
		<b>WG</b> <sup>6</sup> Wire Guard		
		<b>HC</b> Die-Cast Hook, 18/5 Cord		
		<b>HCP</b> Die-Cast Hook, 18/5 Cord, NEMA Twist Lock Plug		


- <sup>1</sup> Aluminum shade matches housing finish. Interior white finish is standard.  
<sup>2</sup> 0-10V Dimming not available with coiled cord.  
<sup>3</sup> Bronze finish only available with stem mounting.  
<sup>4</sup> Silver finish only available with stem and aircraft cable mountings.  
<sup>5</sup> Not available with HC, HCP and coiled cord.  
<sup>6</sup> Compatible only with 16" diameter models.  
<sup>7</sup> Lenses available only with polycarbonate shade.

## MOUNTING


### FIXTURE DIMENSIONS

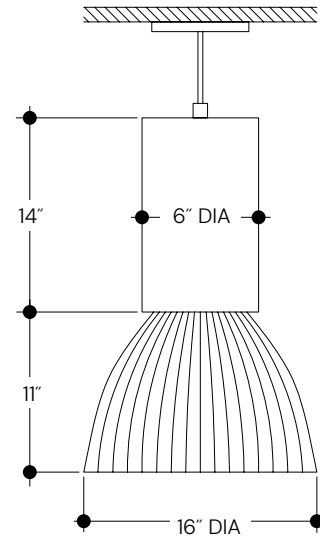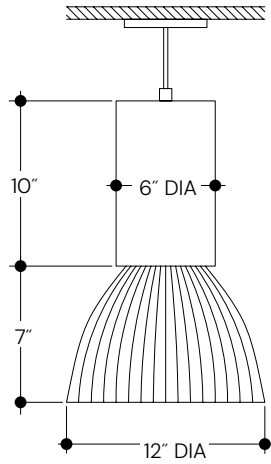


### AIRCRAFT CABLE

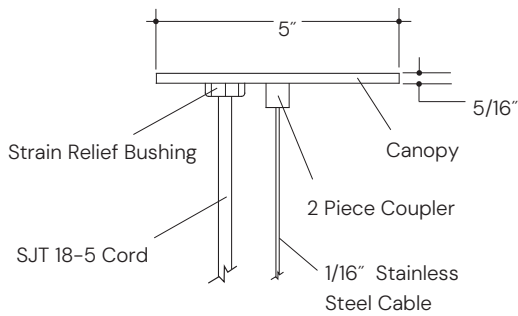

### COILED CABLE

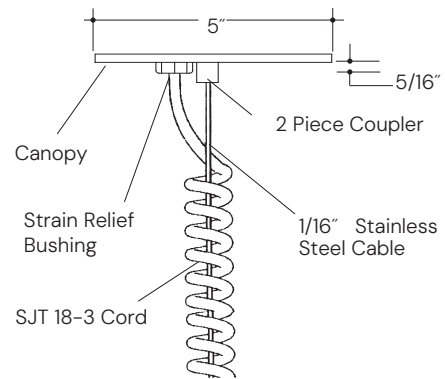

### STEM

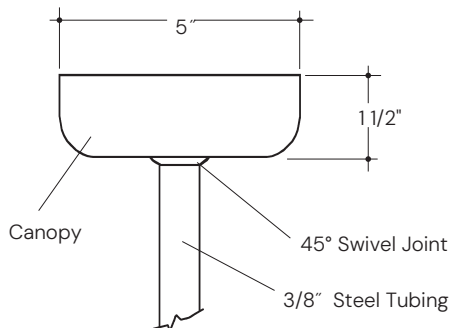











Lumens	Wattage
1100-40K	13.8
1100-27K	14.7
1500-40K	18.8
1500-27K	20.1
2000-40K	25.2
2000-27K	26.4
3000-40K	35.8
3000-27K	37.1
4000-40K	51.0
4000-27K	52.3
5000-40K	56.0
5000-27K	57.4











## AVAILABLE FINISHES

*Set up fee and longer lead time will be applied on custom finishes.*

### Metropolitan

	Black	RAL #9011
	Silver	RAL #9022
	Asher Grey	RAL #7004
	Mason	RAL #7039
	Slate	RAL #7031
	Tech Grey	RAL #7016
	Chocolate Spice	RAL #8017
	Urban Native	RAL #8025
	Carmin	RAL #8028
	Reseda Green	RAL #6011

### Vibrant

	Violet Dreams	RAL #4006
	Purple Red	RAL #3004
	Carmine Red	RAL #3002
	Rose	RAL #3017
	Pure Orange	RAL #2004
	Traffic Yellow	RAL #1023
	Daisy	RAL #1018
	Antique Spring	RAL #6019
	Island Skye	RAL #6027
	Sky Blue	RAL #5015

## COLOR TEMPERATURE GUIDE

2700K	3000K	3500K	4000K	5000K
<b>WARM WHITE</b>	<b>SOFT WHITE GLOW</b>	<b>NEUTRAL GLOW</b>	<b>DAYLIGHT GLOW</b>	<b>CRYSTAL WHITE GLOW</b>
friendly personal intimate	soft warm pleasing	sociable inviting non-threatening	neat clean efficient	bright cool alert
HOMES LIBRARIES RESTAURANTS	HOMES HOTEL ROOMS LOBBIES RETAIL STORES	EXECUTIVE OFFICES RECEPTION AREAS SUPERMARKETS	OFFICES CLASSROOMS MASS MERCHANDISERS SHOWROOMS	GRAPHICS INDUSTRY HOSPITALS GALLERIES BEAUTY SALONS
✓	✓	✓	✓	✗