



## 278

30 Amp, 125/250 Volt, NEMA 14-30R, 3P, 4W, Flush Mtg Outlet /Receptacle, Straight Blade, Industrial Grade, Grounding, Side Wired, Steel Strap, Black

30 Amp, 125/250 Volt, NEMA 14-30R, 3P, 4W, Flush Mtg Receptacle, Straight Blade, Industrial Grade, Grounding, Side Wired, Steel Strap, - Black

### DISCONTINUED

Suggested Replacement SKUs: :

Built of durable thermoplastic, Leviton Power Receptacles — come equipped with heavy-gauge, double-wire copper alloy contacts. To ensure correct and speedy wiring, terminals have ID markings.

**Not Recommended for Electric Vehicle Charging** (See [Leviton EV Outlets](#))

UPC Code : 07847707451

Country Of Origin : Please Contact Customer Service

NEMA :  14-30R

### Technical Information

#### AC Horsepower Ratings

**At Rated Voltage** : 2 HP

#### Environmental Specifications

**Flammability** : Rated V-2 per UL 94

**Operating Temperature** : -40° C to 60°C

#### Mechanical Specifications

**Product ID** : Ratings are permanently marked on device

#### Electrical Specifications

**Amperage** : 30 A

**Current Limiting** : Full Rated Current

**Dielectric Voltage** : Withstands 2000V per UL498

**Grounding** : Grounding

**Pole** : 3

**Temperature Rise** : Max 30C after 50 cycles OL at 150 percent rated current

**Voltage** : 125/250 VAC

**Wire** : 4

#### Material Specifications

**Body Material** : Nylon

**Color** : Black

**Face Material** : Nylon

**Line Contacts** : Brass Double-Wipe

**Strap Material** : Galvanized Steel

#### Product Features

**Amperage** : 30 A

**Color** : Black

**Device Type** : Power Device

**Terminal Accom.** : Up to 4  
AWG

**NEMA** : 14-30R

**Terminal ID** : X (Brass screw  
or Black screw) = Hot, Y (Brass  
screw or Black screw) = Hot;  
White (Silver screw) = Neutral;  
Green (Green screw) = Ground

**Voltage** : 125/250 VAC

Standards and Certifications

**ANSI** : C-73

**CSA C22.2 No. 42** : File  
152105


**NEMA** : WD-6

**NOM** : 057

**UL498** : File E13399

**Warranty** : 10-Year Limited

Wiring Diagram

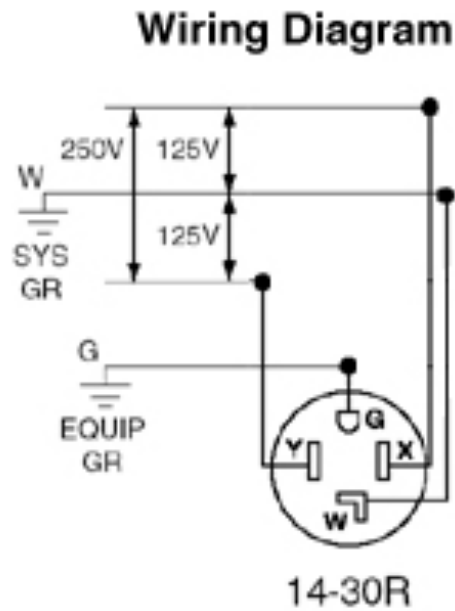

**SPECIFICATION SUBMITTAL**

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/> <input type="text"/>
JOB NUMBER: <input type="text"/>	<input type="text"/> <input type="text"/>

**Leviton Manufacturing Co., Inc**

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

**Leviton Manufacturing of Canada, Ltd.**

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·  
FAX: +1-800-824-3005 ·

**Leviton S. de R.L. de C.V.**

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)  
5386- 1797 ·

**Visit our Website at: [www.leviton.com](http://www.leviton.com)**

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without  
notice.

**Leviton has a global presence.**

If you would like to know where your local Leviton office is located please go to:  
[www.leviton.com/company/about-leviton/locations](http://www.leviton.com/company/about-leviton/locations)

**© 2026 Leviton Manufacturing Co., Inc.**