


Project		Catalog #		Type	
Prepared by		Notes		Date	

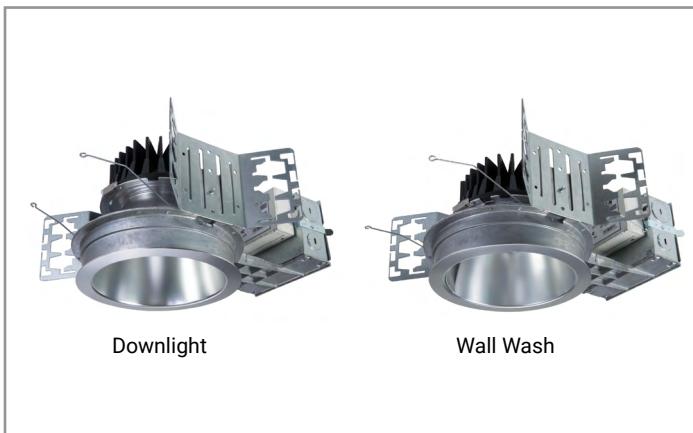

Portfolio

LD6C | EU6C | 6LB

6" Round, New Construction Downlight
Narrow, Medium, Wide Beam or Wall Wash

98CRI, Tunable white and dim to warm
250-11,000 Lumens

Typical Applications

Office • Education • Healthcare • Hospitality • Retail •
Code-Compliance Areas • Sports Venues

Interactive Menu

- Order Information [page 2](#)
- Product Specifications [page 4](#)
- Dimensional & Mounting Details [page 5](#)
- Energy Data [page 6](#)
- Connected System [page 7](#)
- Product Warranty

Product Certification



Control Compatibility




Product Features




Top Product Features

- Die-cast or anodized aluminum reflectors
- Easy disconnect for LED engine replacement and installation
- Standard 0-10V driver dims to 1%; Optional snap in driver for ease of replacement
- 98 CRI; 2700K, 3000K, 3500K, 4000K, 5000K; D2W™ option from 3000K to 1850K
- W2N tunable white CCT range 2700K to 6500K or 2000K to 5000K
- Options to meet Buy American and other domestic preference requirements


Dimensional and Mounting Details



DOWNLIGHT

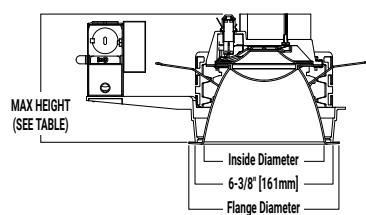

WALL WASH

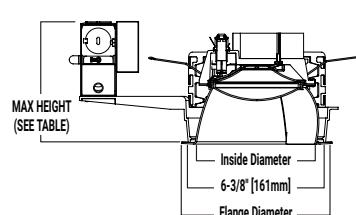

[CLICK HERE](#)
dimension information

Single Line Order Information

SAMPLE ORDER NUMBER: LD6C209830D010M1H

Invoice will indicate separate fixture components (housing, trim, module) which will ship complete from a single CLS facility in separate cartons.

To receive separate components (housing, trim, module) shipment, click on the "Multi-Line Ordering Information Option" button to the right.



Multi-line Ordering Information Option

Housing	Lumen ⁽¹⁾	Color Control	CCT ⁽²⁾
LD6C =LED Downlight 6" Nominal Aperture	02=250 lumens ⁽²⁷⁾	40=4000 Lumens ⁽¹⁰⁾	98 CRI
LD6CP =LED Downlight 6" Nominal Aperture, Chicago Plenum	05=500 lumens ⁽²⁷⁾	45=4500 Lumens ⁽¹⁰⁾	27=2700K
For BAA or TAA use Multi-line Ordering	08=800 lumens ⁽²⁷⁾	50=5000 Lumens ⁽¹⁰⁾	30=3000K
	10=1000 Lumens ⁽²⁸⁾	60=6000 Lumens ⁽¹⁰⁾	35=3500K
	15=1500 Lumens	70=7000 Lumens ⁽¹⁰⁾	40=4000K
	20=2000 Lumens	80=8000 Lumens ⁽¹⁰⁾	50=5000K
	25=2500 lumens	90=9000 Lumens ⁽¹⁰⁾	
	30=3000 Lumens ⁽¹⁰⁾	100=10,000 Lumens ⁽¹⁰⁾	
	35=3500 lumens ⁽¹⁰⁾	110=11,000 Lumens ⁽¹⁰⁾	

Driver	Specify from Driver column. Information below for reference only.
D010 =0-10V Dimming, 1% to 100%, 120V-277V, D2W =800-2500 lumens / 98 CRI =250-4500 lumens (up to 2000 lumens for remote driver)	Offered 800-2500 with D2W, 250-4500 with 98 CRI
1D010 =0-10V Dimming, 1% to 100%, 120V, D2W =3500-4500 & 7000 lumens / 98 CRI =5000, 6000, 7000, 8000, 9000, 10,000 and 11,000 lumens (2500 to 4500 lumens for remote driver)	
2D010 =0-10V Dimming, 1% to 100%, 277V, D2W =3500-4500 & 7000 lumens / 98 CRI =5000, 6000, 7000, 8000, 9000, 10,000 and 11,000 lumens (2500 to 4500 lumens for remote driver)	
3D010 =0-10V Dimming, 1% to 100%, 347V dedicated drivers, D2W =800 to 2500 lumens, 3500 and above use step down transformer / 98 CRI =800-3000 & 250, 500, 3500 and above use step down transformer (250 to 4500 lumens for remote driver)	
D010TR =0-10V (120-277V) or Phase-Cut (120V) dimming, 5-100%, D2W =800-2500 lumens / 98 CRI =250-3000 lumens (up to 2000 lumens for remote driver)	
1D010TR =0-10V or Phase-Cut Dimming, 5% to 100%, 120V, D2W =3500-4500 & 7000 lumens / 98 CRI =3500-6000 & 10,000 lumens (2500 to 3000 lumens for remote driver)	Offered 800-2500 with D2W, 250-3000 with 98 CRI
2D010TR =0-10V Dimming, 5% to 100%, 277V, D2W =3500-4500 & 7000 lumens / 98 CRI =3500-6000 & 10,000 lumens (2500 to 3000 lumens for remote driver)	
3D010TR =0-10V Dimming, 5% to 100% 347V step down transformer, D2W =800-2500, 3500-4500 & 7000 lumens / 98 CRI =250-6000 & 10,000 lumens (250 to 3000 lumens for remote driver)	
DE010 =0-10V Dimming, 0% to 100%, 120V-277V, D2W =800-2500 lumens / 98 CRI =500-4500 lumens (up to 2000 lumens for remote driver) / W2N =1000 lumens	Offered 800-2500 with D2W, 500-4500 with 98 CRI, W2N limited to 1000 lumens with remote driver and 1000-3500 lumens with plug in drivers
1DE010 =0-10V Dimming, 0% to 100%, 120V, D2W =3500-4500 & 7000 lumens / 98 CRI =5000-11,000 lumens (2500 to 4500 lumens for remote driver) / W2N =1500-5000 lumens	
2DE010 =0-10V Dimming, 0% to 100%, 277V, D2W =3500-4500 & 7000 lumens / 98 CRI =5000-11,000 lumens (2500 to 4500 lumens for remote driver) / W2N =1500-5000 lumens	
3DE010 =0-10V Dimming, 0% to 100%, 347V step down transformer, D2W =800-2500, 3500-4500 & 7000 lumens / 98 CRI =500-11,000 lumens (500 to 4500 lumens for remote driver) / W2N =1000-5000 lumens	
D5LT =Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 120V-277V, D2W =800-2500 lumens / 98 CRI =500-4500 lumens (up to 2000 lumens for remote driver) / W2N =1000 lumens	Offered 800-2500 with D2W, 500-4500 with 98 CRI, W2N limited to 1000 lumens with remote driver and 1000-3500 lumens with plug in drivers
1D5LT =Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 0-10V Dimming, 120V, D2W =3500-4500 & 7000 lumens / 98 CRI =5000-11,000 lumens (2500 to 4500 lumens for remote driver) / W2N =1500-5000 lumens	
2D5LT =Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 0-10V Dimming, 277V, D2W =3500-4500 & 7000 lumens / 98 CRI =5000-11,000 lumens (2500 to 4500 lumens for remote driver) / W2N =1500-5000 lumens	
3D5LT =Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 347V step down transformer, D2W =800-2500, 3500-4500 & 7000 lumens / 98 CRI =500-11,000 lumens (500 to 4500 lumens for remote driver) / W2N =1000-5000 lumens	
DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V-277V D2W ; 800-2500 lumens and 98 CRI ; 800-3000 lumens (up to 2000 lumens for remote driver) ⁽¹⁴⁾	
1DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V, D2W ; 3500-4500 and 7000 lumens and 98 CRI ; 3500-6000 and 10000 lumens (2500 to 3000 lumens for remote driver) ⁽¹⁴⁾	Offered 800-2500 with D2W, 800-3000 with 98 CRI
2DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 277V, D2W ; 3500-4500 and 7000 lumens, 98 CRI ; 3500-6000 and 10,000 lumens (2500 to 3000 lumens for remote driver) ⁽¹⁴⁾	
3DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 347V step down transformer D2W ; 800-2500, 3500-4500 and 7000 lumens, 98 CRI ; 800-6000 and 10,000 lumens (800 to 3000 lumens for remote driver) ⁽¹⁴⁾	
DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V-277V, RJ45 Connection, D2W =800-2500 lumens / 98 CRI =800-3000 lumens (up to 2000 lumens for remote driver) ⁽¹⁴⁾	
1DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V, RJ45 Connection, D2W =3500-4500 & 7000 lumens / 98 CRI =3500-6000 & 10,000 lumens (2500 to 3000 lumens for remote driver) ⁽¹⁴⁾	Offered 800-2500 with D2W, 800-3000 with 98 CRI
2DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 277V, RJ45 Connection, D2W =3500-4500 & 7000 lumens / 98 CRI =3500-6000 & 10,000 lumens (2500 to 3000 lumens for remote driver) ⁽¹⁴⁾	
3DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, RJ45 Connection, 347V step down transformer, D2W =800-2500, 3500-4500 & 7000 lumens / 98 CRI =800-6000 & 10,000 lumens (800 to 3000 lumens for remote driver) ⁽¹⁴⁾	
DLE =Lutron Ecosystem dimming 1% to 100%, 120V-277V, 800-2500 lumens (up to 2000 lumens for remote driver)	
1DLE =Lutron Ecosystem dimming 1% to 100%, 120V, D2W =3500-4500 & 7000 lumens / 98 CRI =3000-5000 lumens (2500 lumens for remote driver)	Offered 800-2500 with D2W and 98 CRI
2DLE =Lutron Ecosystem dimming 1% to 100%, 277V, D2W =3500-4500 & 7000 lumens / 98 CRI =3000-5000 lumens (2500 lumens for remote driver)	
3DLE =Lutron Ecosystem dimming 1% to 100%, 347V with step down transformer, D2W =800-2500, 3500-4500 & 7000 lumens / 98 CRI =800-5000 lumens (800 to 2500 lumens for remote driver)	
DLV =Low voltage dimming driver (1-100%) for use with DLVP system, D2W =800-2500 lumens / 98 CRI =800-2000 lumens ⁽³⁾	Offered with remote driver only for 800-2500 with D2W and 800-2000 with 98 CRI

Driver Options	Bar Hanger
Blank =Integral driver	RC15 =Remote 15ft ⁽³⁾
RC100 =Remote 100ft ⁽³⁾ ⁽³³⁾	RC5 =Remote 5ft ⁽³⁾
RC75 =Remote 75ft ⁽³⁾ ⁽³³⁾	RC2 =Remote 2ft ⁽³⁾
RC50 =Remote 50ft ⁽³⁾ ⁽³³⁾	PD =Plug in Driver ⁽²⁶⁾
RC25 =Remote 25ft ⁽³⁾	Blank = Without hanger bars B26 = C-channel Bar Hanger, 26" Long, Pair

Continued on next page.

Single Line Order Information

Trim Distribution ⁽⁵⁾	Trim Flange	Trim Finish	Options ^{(3) (16) (31)}
N =Narrow, Spun Aluminum ^{(26) (30)} M =50° Cutoff, Medium Beam Reflector, Spun Aluminum MD =45° Cutoff, Medium Beam Reflector, Spun Aluminum W =Wide, Spun Aluminum S =Shallow, Spun Aluminum HY =Hyperbolic medium beam ⁽²⁶⁾⁽³⁰⁾ PS =Non-Conductive Shallow, Injection Molded white ^{(11) (12)} CS =Cast Shallow, Die Cast Aluminum BA =Spun Aluminum Baffle ⁽⁷⁾ Wall Wash SWN =Single Wall Wash, Spun Aluminum DWN =Double Wall Wash, Spun Aluminum CW =Corner Wall Wash, Spun Aluminum LSWW =Lensed Single wall wash, Spun Aluminum LDWW =Lensed Double wall wash, Spun Aluminum	0 =White Polymer Trim Ring 1 =Self-flanged ⁽¹³⁾ 2 =White Painted Self-flanged 4 =Knife edge rimless use with die cast only ^{(8) (23)}	LI =Specular Clear ⁽⁹⁾ H =Semi-Specular Clear ⁽⁹⁾ WMH =Warm Haze ⁽⁹⁾ WH =Wheat ⁽⁹⁾ GPH =Graphite Haze ⁽⁹⁾ B =Specular Black ⁽⁹⁾ MW =Matte White (Antimicrobial) MB =Matte Black ⁽⁸⁾ MMS =Matte Metallic Silver ⁽⁸⁾	EMBOD =Bodine® Emergency Module with Remote Test Switch ⁽²⁵⁾ EMBOD6ST =Bodine® 6W Self Test Emergency Module with Remote Test Switch EM7 =7W Emergency Module with Remote Test Switch EM14 =14W Emergency Module with Remote Test Switch EMBOD7ST =Bodine® Self Test Emergency Module ⁽²⁵⁾ IEMBOD =Bodine® Emergency Module with Integral Test Switch ^{(6) (25)} IEM7 =7W Emergency Module with Integral Test Switch ⁽⁶⁾ IEM14 =14W Emergency Module with Integral Test Switch ⁽⁶⁾ EMV7 =7W Low Voltage Emergency Module with Remote Test Switch ⁽⁴⁾ EMV14 =14W Low Voltage Emergency Module with Remote Test Switch ⁽⁴⁾ ETRD =Emergency transfer device ⁽³²⁾ WPST =Factory installed WaveLinx (includes control module, sensor, cable, tilemount and ceiling mount sensor) ^{(15) (18)} WLST =Factory installed WaveLinx LITE Sensor Kit ^{(15) (17)} WPN = WaveLinx PRO Wireless Node without sensor ⁽²¹⁾

Accessories (Sold separately) ⁽²²⁾			
TRM6P =White metal trim ring ⁽²⁾ LGSKT6IP66 =IP66 Gasket Kit DT6RF =6 inch frosted acrylic ring ⁽²⁹⁾ PRR6 =Rimless Plaster Ring ⁽²⁾ RKP6 =Knife Edge plaster Ring ⁽²⁴⁾	RPM6MW =Rimless Millwork Ring, Matte White ⁽²⁾ RPM6MB =Rimless Millwork Ring, Matte Black ⁽²⁾ RKM6MW =Knife Edge Millwork Ring, Matte White ⁽²⁴⁾ RKM6MB =Knife Edge Millwork Ring, Matte Black ⁽²⁴⁾	Connected Lighting Systems ^{(9) (15)} WPST =Field installed WaveLinx sensor Kit ⁽¹⁷⁾ WLST =Field installed WaveLinx LITE Sensor Kit ⁽¹⁸⁾	Bar Hangers HB50 =C-channel Bar Hanger, 50" Long, Pair RMB22 =Wood Joist Bar Hanger, 22" Long, Pair

Notes:
 1. Nominal Lumens will vary depending on selected color, CRI, driver and reflector finish. Reference IES files.

2. Order trim with polymer trim ring (Consult specification sheet for color ordering information and options).
 3. Not available with Chicago Plenum.
 4. ULus listed only
 5. Beam angles are nominal with LI finish trims.
 6. Available with narrow (N), medium (M) and medium 45 degree (MD) Spun Aluminum trims. Required for use with all IEMBOD, IEM7, IEM14, IEMV7 and IEMV14 housings. Not offered with remote driver.
 7. Only available with Matte White and Matte Black Finishes.
 8. Available only on CS distributions.
 9. Not available on PS, CS or BA distributions.
 10. Product is marked spacing. [Reference table on page 4](#).
 11. PS available in self-flanged MW finish only.
 12. Offered up to 2000 lumens
 13. Flange is the same finish as the reflector
 14. DMX fixtures default to full on upon loss of DMX signal.
 15. Refer to system specifications for additional information, features, and benefits. Order either factory installed option or accessory. Use with 0-10V driver.

16. Non-IC
 17. WLST=WaveLinx LITE tilemount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinx LITE system specifications)
 18. WPST=WaveLinx wireless sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with 0-10V only.
 19. Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to [DOMESTIC PREFERENCES](#) website for more information. Components shipped separately may be separately analysed under domestic preference requirements. Offered with spun aluminum narrow (N), medium (M), and wide (W) trims.
 20. Not required for W2N and D2W.
 21. WPN = WaveLinx PRO wireless node provides luminaire-level control with scene and zone configuration without an integrated sensor; Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with 0-10V driver only.
 22. Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.
 23. Accessory (Requires knife edge accessory ring)
 24. Order die cast trim with flange type 4
 25. Not available for W2N
 26. Offered up to 2500 lumens with D2W and 3500 with W2N
 - D010, D5LT, DE010 up to 4500 lumens with 98 CRI
 - D010TR, DMX up to 3000 lumens with 98 CRI
 - DLE, DL2 up to 2500 lumens with 98 CRI
 27. IC rated
 28. Tunable white IC rated with 1000 lumens
 29. Order with self flanged trim.
 30. Offered with DLVP up to 2000 lumens with 98 CRI.
 31. 120V-277V
 32. Used to bypass local control during outage. Must be used in conjunction with UL 1008 device (provided by others)
 33. Not available with Lutron drivers
 34. Not recommended for use with Wall Wash

Product Specifications

Lower Shielding Reflector

- Painted die-cast aluminum or spun aluminum lower reflector with lensed upper optical chamber provides superior lumen output with minimal source brightness
- Spun reflectors are available in all Portfolio anodized finishes
- Hyperbolic reflector provides minimal aperture brightness and glare.
- Available with non-conductive polymer reflector up to 2000 lumens
- Plaster lathing ring, knife edge and millwork ring accessory for flush reflector transition

Wall Wash Reflector

- Open Wall Wash** - wall wash reflector with gradient kicker offered in single, double and corner wall wash provides even vertical illumination with minimal source brightness.
- Rotatable Lensed Wall Wash** - Rotatable lensed wall wash reflector offered in single and double wall wash provides even vertical illumination with minimal source brightness.

Trim Retention

- Two torsion springs hold reflector flange tightly to the finished ceiling surface

Plaster Frame/Collar

- Die-cast aluminum 1 ½" deep collar
- Accommodates up to 2" ceiling thickness

Universal Mounting Bracket

- Accepts 1/2" Electric Metallic Tube (EMT), C-channel and bar hangers
- Adjusts 5" vertically from above and below the ceiling

Junction box

- Four 1/2" and two 3/4" trade size pry outs positioned to allow straight conduit runs
- Lever connectors for simple push in wiring
- Listed for (4) #12 AWG (two in, two out) 90°C conductors and feed thru branch wiring for type IC and Plug in drivers for 120/277V only. For all other cases (8) #12 AWG (four in, four out) 90°C conductors and feed thru branch wiring for 120/277V only

Thermal

- Aluminum heat sink conducts heat away from the LED module for improved performance and longer life

LED System

- Contains a plurality of high brightness white LED's combined with a high reflectance upper reflector and convex transitional lens producing even distribution without pixilation
- Auto resetting, thermally protected, LED's are turned off when safe operating temperatures are exceeded
- Quick disconnect allows for tool-less replacement of LED engine from below ceiling

- 98 CRI and W2N: L70 55,000 hours
- Color variation within 2-step MacAdam ellipses
- Available in 2400K, 2700K, 3000K, 3500K, 4000K and 5000K correlated color temperature (CCT)
- D2W™ - dim-to-warm shifts CCT from 3000K to 1850K as fixture dims mimicking halogen sources.
- W2N - Tunable white CCT range 2700K to 6500K or 2000K to 5000K, 90 CRI. Standard
- 98 CRI** With a full-spectrum approach using broad-blue chip technology and special phosphor blends, Thrive is able to closely match the spectrum of the sun across all color temperatures. Benefits of the natural spectrum of the sun using Thrive include superior accurate color rendering, reduced eye strain, and a higher sense of emotional well-being.

Driver

- Standard 120-277V 0-10V dimming driver provides flicker free dimming from 100% to 1%
- Optional 120V leading edge/0-10V, <1% 0-10V, Fifth Light, DMX or Lutron® Ecosystem
- Driver can be serviced from above or through the aperture
- Distributed low voltage power system combines power, lighting, and controls with ease of installation.
- Optional magnetically guided snap in driver for ease of maintenance.

Emergency Option

- Provides 90 minutes of standby lighting, meeting most life safety codes for egress lighting
- Available with integral or remote charge indicator and test switch
- Available Self-Test (self-diagnostic) with remote charge indicator and test switch
- Emergency Transfer Relay Device bypasses local control during a power outage
- UL 924 listed

Connected Lighting System

Two WaveLinx connected solutions to choose from. Refer to WaveLinx system specifications and application guides for details.

WaveLinx PRO Tilemount Sensor Kit

- WaveLinx WPST tilemount sensor kit offers daylight dimming, PIR motion sensing, scene and zone configuration, automatic commissioning; and optional RLTS - Real Time Location Services available.

WaveLinx PRO Wireless Node

- WaveLinx PRO wireless node provides luminaire-level control with scene and zone configuration without an integrated sensor; Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with 0-10V driver only.

WaveLinx LITE Tilemount Sensor Kit

- WaveLinx LITE WLST tilemount sensor kit offers daylight dimming and PIR motion sensing, scene and grouping configuration.

WaveLinx Tilemount Kits Application

- The WPST and WLST tilemount kits include a control module mounted on the luminaire junction box via 1/2" knock-out, and a tilemount sensor on 54-inch whip; for ceiling installation by direct-mount spring clips or via mounting bracket in octagon ceiling boxes.
- The WPST and WLST tilemount kits may be ordered as factory installed on the luminaire, or ordered separately as a field installed accessory kit.

Code Compliance

- Thermally protected
- cULus Certified to UL 1598 / C22.2 No. 250.0 suitable for wet locations with downlight; damp location with wall wash and hyperbolic with covered ceiling
- IP66 rated when used with IP66 gasket kit accessory
- Use IP66 gasket with non conductive reflector for sauna or steam room applications up to 2000 lumens and 40°C.
- Optional City of Chicago environmental air (CCEA) marking for plenum applications
- FCC CFR Title 47 Part 15 Class B at 120VAC and Class A at 277VAC
- Insulated ceiling (IC) rated up to 800 lumens (98 CRI & D2W); 1000 lumens (W2N). All others are non-IC rated (insulation must be kept 3" from top and sides of housing).
- Can be used for State of California Title 24 high efficacy LED compliance under JA8, reference Modernized Appliance Efficiency Database System (MAEDBS) for 2016 JA8 High Efficacy Lighting
- RoHS compliant
- Photometric testing completed in accordance with IES LM-79
- LED life testing completed in accordance with IES LM-80-08 and TM-21-11 standards
- See table on page 3 for marked spacing requirements

Warranty

- Five year warranty www.cooperlighting.com/legal

Marked Spacing


6-inch Marked spacing for 98 CRI			
3000-11,000	36	36	8

6-inch Marked spacing for D2W			
7000	36	36	8




6-inch Marked spacing for W2N			
3500	36	36	0.5
4000-5000	36	36	8

Dimensional and Mounting Details

DOWNLIGHT

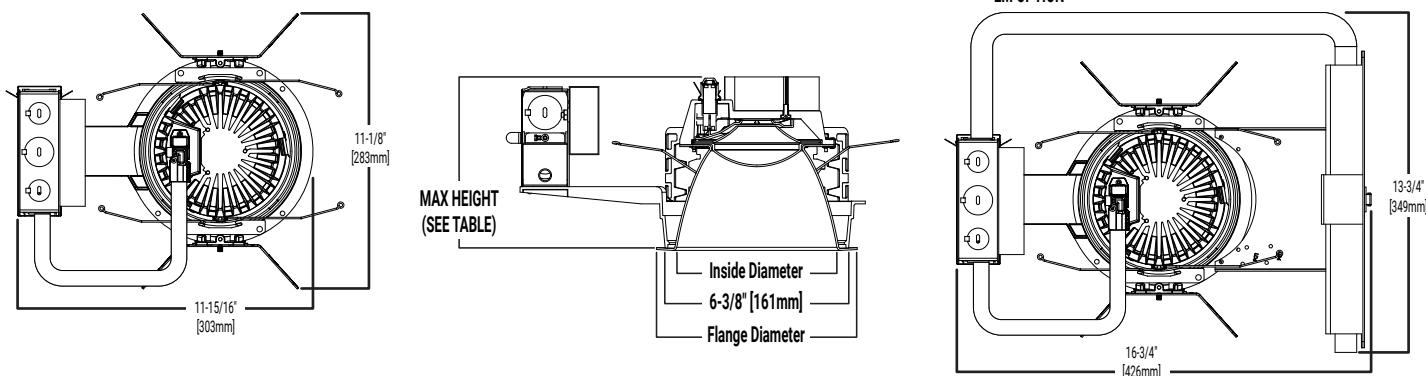

WALL WASH

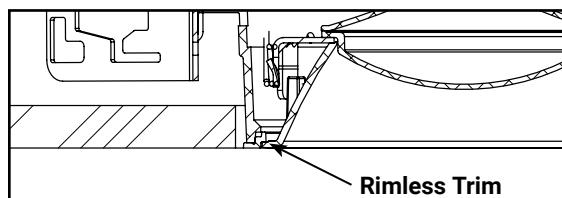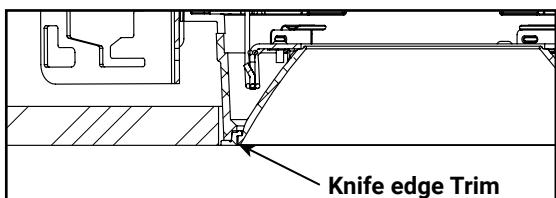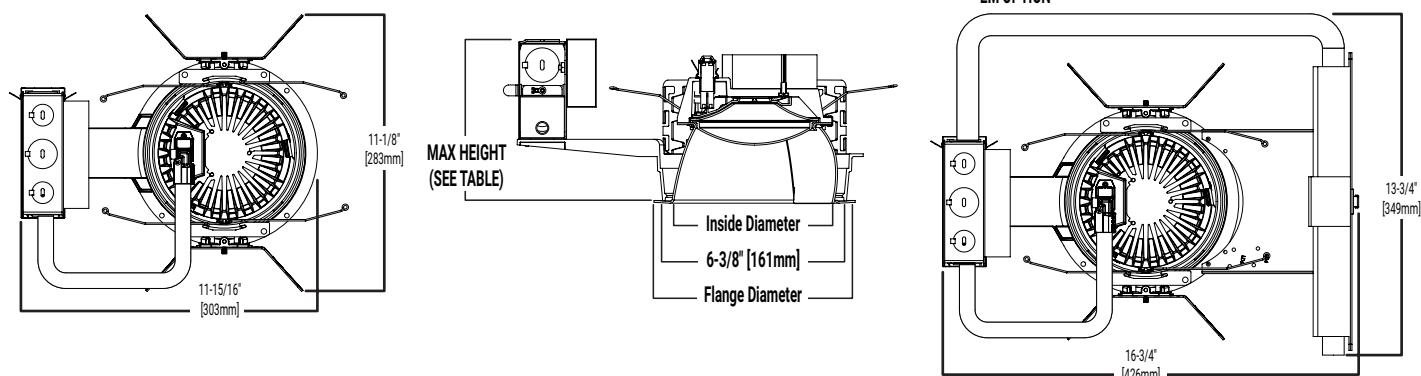

CATALOG #	INSIDE DIAMETER [IN]	MAX HEIGHT				
		250-2500 LUMENS	3000-4000 LUMENS	1000-1500IC LUMENS	6500-7000 LUMENS	9000-15000 LUMENS
6LBN	5.54	5.7	5.9	6.1	7.1	9.1
6LBM	5.54	5.7	5.9	6.1	7.1	9.1
6LBW	5.56	5.6	5.6	5.6	6.2	8.2
6LBBA	5.56	5.7	5.9	6.1	7.1	9.1
6LBMD	5.55	6.7	6.9	7	8	10
6LBHY	5.68	5.9	6	6.2	7.2	9.2
6LBS	5.62	5.6	5.6	5.6	5.6	6.7
6LBPS	5.66	5.6	5.6	5.6	5.6	6.7
6LBCS	5.66	5.6	5.6	5.6	5.6	6.7

6LBSWN	5.56	5.6	5.6	5.6	6.2	8.2
6LBDWN	5.56	5.6	5.6	5.6	6.2	8.2
6LBCW	5.14	5.6	5.6	5.6	6.3	8.3
6LBLSWW	5.56	5.6	5.6	5.6	6.2	8.2
6BLBDWW	5.56	5.6	5.6	5.6	6.2	8.2

Energy and Performance Data

D010 DRIVER ENERGY DATA

Series	250 lumen		500 lumen		800 lumen		1000 lumen		1500 lumen		2000 lumen	
Input Voltage 120-277VAC	120V	277V	120V	277V	120V	277V	120V	277V	120V	277V	120V	277V
Input Current (A)	0.029	0.017	0.061	0.032	0.085	0.041	0.084	0.042	0.135	0.063	0.189	0.084
Input Power (W)	3.45	3.87	7.33	7.78	10.15	10.52	10.04	10.43	16.17	16.56	22.58	22.63
In-rush (A)	2.1	8.5	3.7	8.5	3.6	8.3	3.6	8.4	2.3	9.5	2.1	9.7
Inrush duration (μs)	250	131	190	136	220	135	226	136	230	125	243	132
THDi (%)	7.21	16.92	7.82	10.78	5.57	9.63	7.78	9.24	4.75	9.93	8.03	7.44
PF	≥ 0.98	≥ 0.9	≥ 0.99	≥ 0.93	≥ 0.99	≥ 0.95	≥ 0.99	≥ 0.95	≥ 0.99	≥ 0.94	≥ 0.99	≥ 0.96
Series	2500 lumen		3000 lumen		3500 lumen		4000 lumen		4500 lumen		5000 lumen	
Input Voltage 120-277VAC	120V	277V	120V	277V	120V	277V	120V	277V	120V	277V	120V	277V
Input Current (A)	0.276	0.121	0.276	0.121	0.333	0.152	0.404	0.181	0.421	0.192	0.491	0.216
Input Power (W)	32.98	32.57	32	32.57	39.83	39.84	48.38	47.94	50.22	50.17	58.69	58.01
In-rush (A)	2.5	11.8	3.6	11.8	3.1	14.3	3.1	14.5	5.6	22.6	5.6	22.6
Inrush duration (μs)	215	111	220	111	200	94	197	95	215	120	213	135
THDi (%)	9.86	6.57	5.57	6.57	4.25	10.05	5.02	7.97	6.12	8.35	8.51	7.92
PF	≥ 0.99	≥ 0.97	≥ 0.99	≥ 0.99	≥ 0.99	≥ 0.94	≥ 0.99	≥ 0.95	≥ 0.99	≥ 0.95	≥ 0.99	≥ 0.96
Series	6000 lumen		7000 lumen		8000 lumen		9000 lumen		10000 lumen		11000 lumen	
Input Voltage 120-277VAC	120V	277V	120V	277V	120V	277V	120V	277V	120V	277V	120V	277V
Input Current (A)	0.542	0.256	0.632	0.292	0.734	0.332	0.842	0.374	0.961	0.416	1.09	0.49
Input Power (W)	64.88	65.7	75.56	75.85	88.01	87.81	101.12	99.88	114.86	113.66	130.27	127.6
In-rush (A)	6.2	27.5	6.4	29.1	6.3	29.7	12.9	28.6	11.4	40.3	11.5	40.2
Inrush duration (μs)	188	101	187	90	187	123	170	97	248	124	233	118
THDi (%)	4.33	11.86	4.84	10.32	3.92	8.92	5.74	9.28	7.42	8.55	6.08	13.13
PF	≥ 0.99	≥ 0.93	≥ 0.99	≥ 0.94	≥ 0.99	≥ 0.95	≥ 0.99	≥ 0.95	≥ 0.99	≥ 0.98	≥ 0.99	≥ 0.9

Minimum starting temperature -30°C (-22°F)*
(Nominal input 120-277VAC & 100% of rated output power)


Sound Rating: Class A standards

Notes:

Emergency Battery packs are rated for a minimum starting temperature of 0°C.

COLOR METRICS - TM-30-15 & CRI/CIE

98 CRI Color Metric Summary - 3500K*

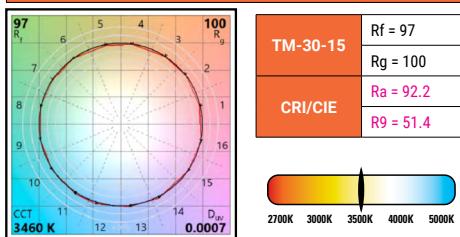

* Color values are based on haze reflector, other finishes and field results may vary.

Beam Angles

Trim	Beam Angle
6LBMH	MEDIUM 60° BEAM (H)
6LBMLI	MEDIUM 55° BEAM (LI)
6LBNH	NARROW 55° BEAM (H)
6LBNLI	NARROW 30° BEAM (LI)
6LBSH	SHALLOW 85° BEAM (H)
6LBSLI	SHALLOW 70° BEAM (LI)
6LBWH	WIDE 80° BEAM (H)

Trim	Beam Angle
6LBWLI	WIDE 80° BEAM (LI)
6LBSWNL	SINGLE WALL WASH (LI)
6LBLSWWH	LENSED WALL WASH (H)
6LBLSWWL	LENSED WALL WASH (LI)
6LBMDH	MEDIUM BEAM 45° CUTOFF 50° BEAM (H)
6LBMDLI	MEDIUM BEAM 45° CUTOFF 50° BEAM (LI)

Connected Solutions




WaveLinx LITE - WLST Tilemount Sensor

- Intuitive Android™ or Apple® iOS® app for basic system code compliant set up and configuration via Bluetooth
- Up to 28 unique areas per project site (WaveLinx LITE Bluetooth network)
- Up to 50 devices for an area, any one of 16 control zones, up to 6 occupancy sets, and custom lighting scenes
- Automatic occupancy or vacancy, sensor sensitivity, daylight dimming, etc. configurable through the app
- Refer to the WaveLinx system specifications for details



WaveLinx LITE WLST Tilemount Wiring Diagram

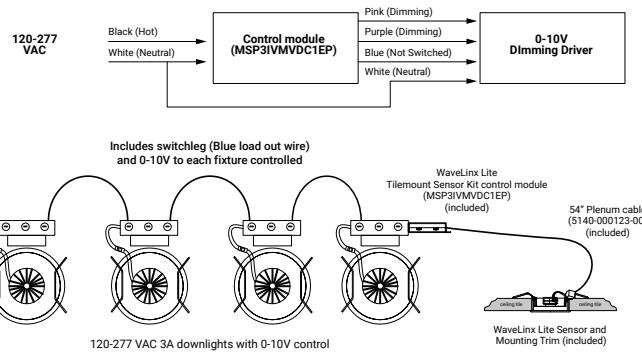

WaveLinx LITE Bluetooth Enabled System




WaveLinx PRO Wireless – WPST Tilemount Sensor




- WaveLinx PRO Wireless functionality configures zones and customizes settings from one secure mobile app
- Automatic code commissioning that meets the strictest codes
- Fixtures and sensors integrate with Wireless Area Controller, Wall Stations, and Control Devices
- Stand-Alone Offices or Entire Building Network Installations




WaveLinx mobile app settings

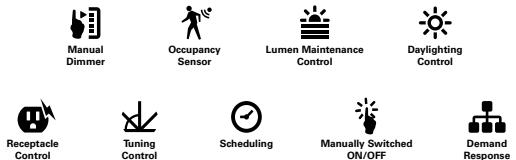

WaveLinx PRO WPST Tilemount Wiring Diagram

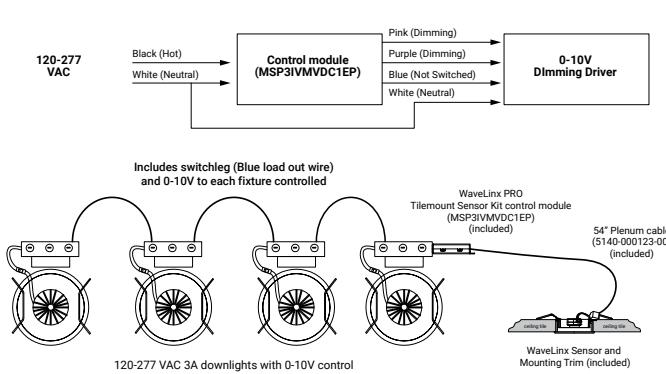

WaveLinx CORE Building Management Integration

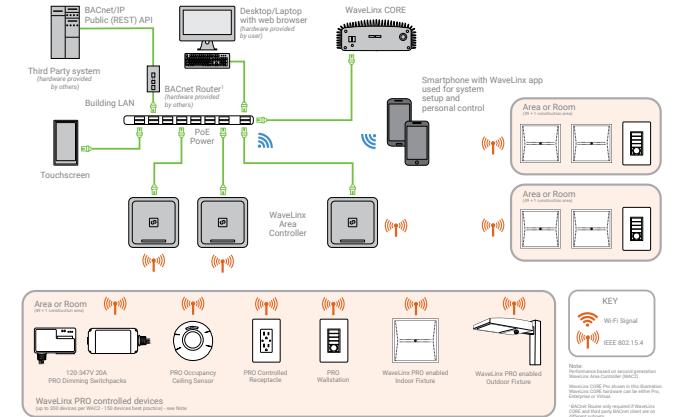


Connected Solutions

WaveLinx PRO Wireless Node - WPN


- WaveLinx Wireless functionality configures zones and customizes settings from one secure mobile app
- Automatic code commissioning that meets the strictest codes
- Fixtures and sensors integrate with WaveLinx Area Controller, Wall Stations, and Control Devices
- Stand-Alone Offices or Entire Building Network Installations



WaveLinx PRO Wireless Node (WPN) Wiring Diagram

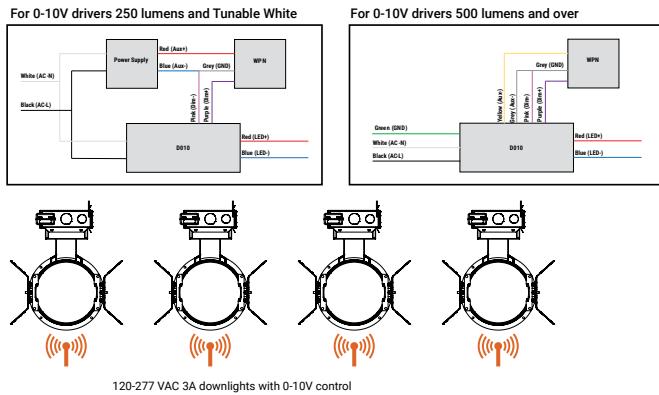

WaveLinx CORE Building Management Integration

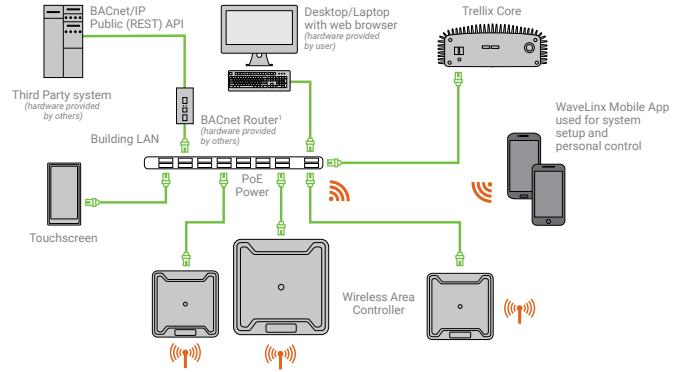

Multi-line Order Information

SAMPLE ORDER NUMBER: LD6C10D010TRIEM14

Invoice will indicate separate fixture components (housing, trim, module) and may ship from multiple CLS facilities in separate cartons.


 Single line Ordering Information Option

Domestic Preferences ⁽¹⁾	Housing	Lumens ⁽²⁾						Color Control	
[Blank] =Standard BAA =Buy American Act TA =Trade Agreements Act	LD6C =LED Downlight 6-inch Nominal Aperture LD6CCP =LED Downlight 6-inch Nominal Aperture, Chicago Plenum	02 =250 lumens 05 =500 lumens 08 =800 lumens 10 =1000 lumens	15 =1500 lumens 20 =2000 lumens 25 =2500 lumens 30 =3000 lumens ⁽³⁾	35 =3500 lumens ⁽³⁾ 40 =4000 lumens ⁽³⁾ 45 =4500 lumens ⁽³⁾ 50 =5000 lumens ⁽³⁾	60 =6000 lumens ⁽³⁾ 70 =7000 lumens ⁽³⁾ 80 =8000 Lumens ⁽³⁾ 90 =9000 Lumens ⁽³⁾	100 =10,000 Lumens ⁽³⁾ 110 =11,000 Lumens ⁽³⁾	Blank =W2N D2W =Dim to warm FS =Full spectrum (Thrive) used with 98 CRI light engine		

Driver (Specify from Driver column.)								Information below for reference only.
								Remote driver & plug in driver
D010 =0-10V Dimming, 1% to 100%, 120V-277V, D2W =800-2500 lumens / 98 CRI =250-4500 lumens (up to 2000 lumens for remote driver)								
1D010 =0-10V Dimming, 1% to 100%, 120V, D2W =3500-4500 & 7000 lumens / 98 CRI =5000-11,000 lumens (2500 to 4500 lumens for remote driver)								800-2500 with D2W, 250-4500 with 98 CRI
2D010 =0-10V Dimming, 1% to 100%, 277V, D2W =3500-4500 & 7000 lumens / 98 CRI =5000-11,000 lumens (2500 to 4500 lumens for remote driver)								
3D010 =0-10V Dimming, 1% to 100%, 347V dedicated drivers, D2W =800 to 2500 lumens; 3500 and above use step down transformer / 98 CRI =800-3000 lumens & 250, 500, 3500 and above use step down transformer (250 to 4500 lumens for remote driver)								
1 driver : D2W 800-2500 lumens, 98CRI 250-4500 lumens; 2 drivers : D2W 3500-4500 lumens, 98CRI 5000-9000 lumens; 3 drivers : D2W 7000 lumens, 98 CRI 10,000-11,000 lumens								
D010TR =0-10V (120-277V) or Phase-Cut (120V) dimming, 5-100%, D2W =800-2500 lumens / 98 CRI =250-3000 lumens (up to 2000 lumens for remote driver)								
1D010TR =0-10V or Phase-Cut Dimming, 5% to 100%, 120V, D2W =3500-4500 & 7000 lumens / 98 CRI =3500-6000 & 10,000 lumens (2500 to 3000 lumens for remote driver)								800-2500 with D2W, 250-3000 with 98 CRI
2D010TR =0-10V Dimming, 5% to 100%, 277V, D2W =3500-4500 & 7000 lumens / 98 CRI =3500-6000 & 10,000 lumens (2500 to 3000 lumens for remote driver)								
3D010TR =0-10V Dimming, 5% to 100%, 347V step down transformer, D2W =800-2500, 3500-4500 & 7000 lumens / 98 CRI =250-6000 & 10,000 lumens (250 to 3000 lumens for remote driver)								
1 driver : D2W 800-2500 lumens, 98CRI 250-3000 lumens; 2 drivers : D2W 3500-4500 lumens, 98CRI 3500-6000 lumens; 3 drivers : D2W 7000 lumens, 98 CRI 10,000 lumens								
DE010 =0-10V Dimming, 0% to 100%, 120V-277V, D2W =800-2500 lumens / 98 CRI =500-4500 lumens (up to 2000 lumens for remote driver) / W2N =1000 lumens								
1DE010 =0-10V Dimming, 0% to 100%, 120V, D2W =3500-4500 & 7000 lumens / 98 CRI =5000-11,000 lumens (2500 to 4500 lumens for remote driver) / W2N =1500-5000 lumens								800-2500 with D2W, 500-4500 with 98 CRI
2DE010 =0-10V Dimming, 0% to 100%, 277V, D2W =3500-4500 & 7000 lumens / 98 CRI =5000-11,000 lumens (2500 to 4500 lumens for remote driver) / W2N =1500-5000 lumens								
3DE010 =0-10V Dimming, 0% to 100%, 347V step down transformer, D2W =800-2500, 3500-4500 & 7000 lumens / 98 CRI =500-11,000 lumens (500 to 4500 lumens for remote driver) / W2N =1000-5000 lumens								
1 driver : D2W 800-2500 lumens, 98CRI 500-4500 lumens; 2 drivers : D2W 3500-4500 lumens, 98CRI 5000-9000 lumens; 3 drivers : D2W 7000 lumens, 98 CRI 10,000-11,000 lumens								
D5LT =Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 120V-277V, D2W =800-2500 lumens / 98 CRI =500-4500 lumens (up to 2000 lumens for remote driver) / W2N =1000 lumens								
1D5LT =Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 120V, D2W =3500-4500 & 7000 lumens / 98 CRI =5000-11,000 lumens (2500 to 4500 lumens for remote driver) / W2N =1500-5000 lumens								800-2500 with D2W, 500-4500 with 98 CRI
2D5LT =Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 277V, D2W =3500-4500 & 7000 lumens / 98 CRI =5000-11,000 lumens (2500 to 4500 lumens for remote driver) / W2N =1500-5000 lumens								
3D5LT =Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 347V step down transformer, D2W =800-2500, 3500-4500 & 7000 lumens / 98 CRI =500-11,000 lumens								
1 driver : D2W 800-2500 lumens, 98CRI 500-4500 lumens; 2 drivers : D2W 3500-4500 lumens, 98CRI 5000-9000 lumens; 3 drivers : D2W 7000 lumens, 98 CRI 10,000-11,000 lumens								
DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V-277V, D2W =800-2500 lumens / 98 CRI =800-3000 lumens (up to 2000 lumens for remote driver) ⁽⁵⁾								
1DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V, D2W =3500-4500 & 7000 lumens / 98 CRI =3500-6000 & 10,000 lumens (2500 to 3000 lumens for remote driver) ⁽⁵⁾								800-2500 with D2W, 800-3000 with 98 CRI
2DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 277V, D2W =3500-4500 & 7000 lumens / 98 CRI =3500-6000 & 10,000 lumens (2500 to 3000 lumens for remote driver) ⁽⁵⁾								
3DMX =DMX/RDM Logarithmic Dimming, 0% to 100%, 347V step down transformer, D2W =800-2500, 3500-4500 & 7000 lumens / 98 CRI =800-6000 & 10,000 lumens (800 to 3000 lumens for remote driver) ⁽⁵⁾								
1 driver : D2W 800-2500 lumens, 98CRI 800-3000 lumens; 2 drivers : D2W 3500-4500 lumens, 98CRI 3500-6000 lumens; 3 drivers : D2W 7000 lumens, 98 CRI 10,000 lumens								
DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V-277V, RJ45 Connection, D2W =800-2500 lumens / 98 CRI =800-3000 lumens (up to 2000 lumens for remote driver) ⁽⁵⁾								
1DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 120V, RJ45 Connection, D2W =3500-4500 & 7000 lumens / 98 CRI =3500-6000 & 10,000 lumens (2500 to 3000 lumens for remote driver) ⁽⁵⁾								800-2500 with D2W, 800-3000 with 98 CRI
2DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 277V, RJ45 Connection, D2W =3500-4500 & 7000 lumens / 98 CRI =3500-6000 & 10,000 lumens (2500 to 3000 lumens for remote driver) ⁽⁵⁾								
3DMXC5 =DMX/RDM Logarithmic Dimming, 0% to 100%, 347V step down transformer, RJ45 Connection, D2W =800-2500, 3500-4500 & 7000 lumens / 98 CRI =800-6000 & 10,000 lumens (800 to 3000 lumens for remote driver) ⁽⁵⁾								
1 driver : D2W 800-2500 lumens, 98CRI 800-3000 lumens; 2 drivers : D2W 3500-4500 lumens, 98CRI 3500-6000 lumens; 3 drivers : D2W 7000 lumens, 98 CRI 10,000 lumens								
DLE =Lutron Ecosystem dimming 1% to 100%, 120V-277V, D2W =800-2500 lumens / 98 CRI =800-2500 lumens (up to 2000 lumens for remote driver)								
1DLE =Lutron Ecosystem dimming 1% to 100%, 120V, D2W =3500-4500 & 7000 lumens / 98 CRI =3000-5000 (2500 lumens for remote driver)								800-2500 with D2W and 98 CRI
2DLE =Lutron Ecosystem dimming 1% to 100%, 277V, D2W =3500-4500 & 7000 lumens / 98 CRI =3000-5000 (2500 lumens for remote driver)								
3DLE =Lutron Ecosystem dimming 1% to 100%, 347V with step down transformer, D2W =800-2500, 3500-4500 & 7000 lumens / 98 CRI =800-5000 lumens (800 to 2500 lumens for remote driver)								
1 driver : D2W 800-2500 lumens, 98CRI 800-2500 lumens; 2 drivers : D2W 3500-4500 lumens, 98CRI 3000-5000 lumens; 3 drivers : D2W 7000 lumens								
DLV =Low voltage dimming driver (1-100%) for use with DLVP system, D2W =800-2500 lumens / 98 CRI =800-2000 lumens ⁽⁶⁾								800-2500 with D2W and 800-2000 with 98 CRI (Not offered with plug in driver)
DE010W2N2765 =Tunable white 2700-6500K, 0-10V Dimming, 0% to 100%, 120-277V 1000 lumens								
1DE0102765 =Tunable white 2700-6500K, 120V, 0-10V Dimming, 0% to 100%, 1500-5000 lumens								
2DE0102765 =Tunable white 2700-6500K, 277V, 0-10V Dimming, 0% to 100%, 1500-5000 lumens								
3DE0102765 =Tunable white 2700-6500K, 347V with step down transformer, 0-10V Dimming, 0% to 100%, 1000-5000 lumens								
1 driver : 1000-3500 lumens; 2 drivers : 4000-5000 lumens								
DE010W2N2050 =Tunable white 2000-5000K, 0-10V Dimming, 0% to 100%, 120-277V 1000 lumens								
1DE0102050 =Tunable white 2000-5000K, 120V, 0-10V Dimming, 0% to 100%, 1500-5000 lumens								
2DE0102050 =Tunable white 2000-5000K, 277V, 0-10V Dimming, 0% to 100%, 1500-5000 lumens								
3DE0102050 =Tunable white 2000-5000K, 347V with step down transformer, 0-10V Dimming, 0% to 100%, 1000-5000 lumens								
1 driver : 1000-3500 lumens; 2 drivers : 4000-5000 lumens								
D5LTW2N2765 =Tunable white 2700-6500K, 120V-277V Fifth Light® (DALI T6) Dimming, 0% to 100%, 120-277V 1000 lumens								
1D5LTW2N2765 =Tunable white 2700-6500K, 120V Fifth Light® (DALI T6) Dimming, 0% to 100%, 1500-5000 lumens								
2D5LTW2N2765 =Tunable white 2700-6500K, 277V Fifth Light® (DALI T6) Dimming, 0% to 100%, 1500-5000 lumens								
3D5LTW2N2765 =Tunable white 2700-6500K, 347V Fifth Light® (DALI T6) Dimming, 0% to 100%, 1000-5000 lumens								
1 driver : 1000-3500 lumens; 2 drivers : 4000-5000 lumens								
D5LTW2N2050 =Tunable white 2000-5000K, 120V-277V Fifth Light® (DALI T6) Dimming, 0% to 100%, 120-277V 1000 lumens								
1D5LTW2N2050 =Tunable white 2000-5000K, 120V Fifth Light® (DALI T6) Dimming, 0% to 100%, 1500-5000 lumens								
2D5LTW2N2050 =Tunable white 2000-5000K, 277V Fifth Light® (DALI T6) Dimming, 0% to 100%, 1500-5000 lumens								
3D5LTW2N2050 =Tunable white 2000-5000K, 347V with step down transformer Fifth Light® (DALI T6) Dimming, 0% to 100%, 1000-5000 lumens								
1 driver : 1000-3500 lumens; 2 drivers : 4000-5000 lumens								

Continued on next page.

Multi-line Order Information

Driver Options	Options ^{(6) (29) (30)}
Blank =Integral driver R =Remote driver (order remote driver separately) ⁽⁶⁾ PD =Plug in Driver ⁽⁸⁾	EMBOD =Bodine® Emergency Module with Remote Test Switch ⁽¹⁰⁾ EMBOD6ST =Bodine® 6W Self Test Emergency Module with Remote Test Switch EM7 =7W Emergency Module with Remote Test Switch EM14 =14W Emergency Module with Remote Test Switch EMBOD7ST =Bodine® Self Test Emergency Module ⁽¹⁰⁾ IEMBOD =Bodine® Emergency Module with Integral Test Switch ^{(10) (22)} IEM7 =7W Emergency Module with Integral Test Switch ⁽²²⁾ IEM14 =14W Emergency Module with Integral Test Switch ⁽²²⁾

SAMPLE ORDER NUMBER: EU6C10259035

Domestic Preferences ⁽¹⁾	Power Module	Lumen Levels ⁽²⁾	CRI ⁽²⁾	Color	
[Blank] =Standard BAA =Buy American Act TAA =Trade Agreements Act	EU6C =6-inch Universal LED Module	One 98 CRI THRIVE LED for use with one driver 0208IC =250, 500 and 800 lumens 98 CRI, IC rated (For use with all drivers, min 500 lumens with DE010 and D5LT, min 800 lumens with DLVP, Lutron and DMX) 1025 =1000, 1500, 2000 and 2500 lumens, 98 CRI (For use with D010, D010TR, DE010, DMX and Lutron 1000-2500 lumens, DLVP 1000-2000 lumens) 3045 =3000, 3500, 4000 and 4500 lumens, 98 CRI (For use with D010, D5LT and DE010 3000-4500 lumens, D010TR and DMX 3000 lumens) ⁽³⁾ Two 98 CRI THRIVE LED for use with two drivers 30452 =3000, 3500, 4000 and 4500 lumens, 98 CRI (For use with Lutron 3000-4500 lumens, D010TR and DMX 3500-4500 lumens) ⁽³⁾ 5090 =5000, 6000, 7000, 8000 and 9000 lumens, 98 CRI (For use with D010, DE010 and D5LT 5000-9000 lumens, D010TR and DMX 5000-6000 lumens, Lutron 5000 lumens) ⁽³⁾ Three 98 CRI THRIVE LED for use with three drivers 100110 =10000, 11000 lumens (D010, DE010 and D5LT 10,000-11,000 lumens, D010TR and DMX 10,000 lumens) ⁽³⁾ Dim 2 Warm 08259030D2W =800-2500 lumen, 90 CRI, Dim 2 Warm (1 driver and 1 LED) ⁽³³⁾ 35459030D2W =3500-4500 lumen, 90 CRI, Dim 2 Warm (2 drivers and LEDs) 709030D2W =7000 lumens, 90 CRI, Dim 2 Warm (3 drivers and LEDs) ⁽³⁾ Tunable white 1030W2N902765 =1000, 1500, 2000, 2500, 3000 lumens, 90 CRI, tunable white 2700K-6500K ⁽³⁴⁾ 1030W2N902050 =1000, 1500, 2000, 2500, 3000 lumens, 90 CRI, tunable white 2000K-5000K ⁽³⁴⁾ 35W2N902765 =3500 lumens, 90 CRI, tunable white 2700K-6500K ⁽³⁾ 35W2N902050 =3500 lumens, 90 CRI, tunable white 2000K-5000K ⁽³⁾ 4050W2N902765 =4000, 4500, 5000 lumens, 90 CRI, tunable white 2700K-6500K (2 drivers and LEDs) ⁽³⁾ 4050W2N902050 =4000, 4500, 5000 lumens, 90 CRI, tunable white 2000K-5000K (2 drivers and LEDs) ⁽³⁾	98 =98CRI Minimum	98 CRI 27 =2700K 30 =3000K 35 =3500K 40 =4000K 50 =5000K	

SAMPLE ORDER NUMBER: 6LBM2H

Trim	Reflector	Flange	Finish	Options
6LB =6-inch LED N =Narrow, Spun Aluminum ^{(8) (23)} M =50° Cutoff, Medium Beam Reflector, Spun Aluminum MD =45° Cutoff, Medium Beam Reflector, Spun Aluminum W =Wide, Spun Aluminum S =Shallow, Spun Aluminum HY =Hyperbolic medium beam ^{(8) (23)} PS =Non-Conductive Shallow, Injection Molded white ^{(16) (17)} CS =Cast Shallow, Die Cast Aluminum BA =Spun Aluminum Baffle ⁽²⁴⁾	Wall Wash SWW =Single wall wash, spun aluminum DWW =Double wall wash, spun aluminum CW =Corner wall wash, spun aluminum LSWW =Lensed single wall wash, spun aluminum LDWW =Lensed double wall wash, spun aluminum	0 =White polymer trim ring 1 =Self flanged ⁽¹⁸⁾ 2 =White painted self flanged 4 =Knife edge rimless use with die cast only ⁽¹⁹⁾	LI =Specular Clear ⁽²⁰⁾ H =Semi-Specular Clear ⁽²⁰⁾ WMH =Warm Haze ⁽²⁰⁾ WH =Wheat ⁽²⁰⁾ GPH =Graphite Haze ⁽²⁰⁾ B =Specular Black ⁽²⁰⁾ MW =Matte White MB =Matte Black ⁽²¹⁾ MMS =Matte Metallic Silver ⁽²¹⁾	E =Integral Emergency Test Switch Hole ⁽²²⁾

Continued on next page.

Multi-line Order Information

REQUIRED if Remote Driver (R) is specified

SAMPLE ORDER NUMBER: RC10010D010TREM7

Domestic Preferences ⁽¹⁾	Remote Drivers ⁽⁶⁾	Lumens ^{(2) (14)}		Color Control
[Blank]=Standard TAA=Trade Agreements Act	RC100=Remote 100ft RC75=Remote 75ft RC50=Remote 50ft RC25=Remote 25ft RC15=Remote 15ft RC5=Remote 5ft RC2=Remote 2ft	02=250 lumens 05=500 lumens 08=800 lumens 10=1000 lumens 15=1500 lumens	20=2000 lumens 25=2500 lumens 30=3000 lumens 35=3500 lumens 40=4000 lumens 45=4500 lumens	[Blank]=W2N D2W=Dim to warm FS=Full spectrum (Thrive) used with 98 CRI light engine up to 6,000 lumens

Driver		Specify from Driver column. Information below for reference only.	
		98 CRI	D2W
D010=0-10V Dimming, <1% to 100%, 120V-277V D2W; 800-2500 lumens, 98 CRI; 250-2000 lumens			
1D010 = 0-10V Dimming, <1% to 100%, 120V, 98 CRI; 2500-4500 lumens		250-4,500	800-2,500
2D010 = 0-10V Dimming, <1% to 100%, 277V, 98 CRI; 2500-4500 lumens			
3D010 = 0-10V Dimming, <1% to 100%, 347V dedicated driver D2W; 800-2500 lumens, 98 CRI; 800-3000 lumens, with step down transformer for 98 CRI 250, 500 and 3500-4500 lumens			
D010TR=0-10V (120-277V) or Phase-Cut (120V) dimming, 5-100%, D2W; 800-2500 lumens, 98 CRI; 250-2000 lumens			
1D010TR = 0-10V or Phase-Cut Dimming, 120V, 98 CRI; 2500-3000 lumens		250-3,000	800-2,500
2D010TR = 0-10V Dimming, 277V, 98 CRI; 2500-3000 lumens			
3D010TR = 0-10V Dimming, 347V with step down transformer, D2W; 800-2500 lumens, 98 CRI; 250-3000 lumens			
DE010=0-10V Dimming, 0% to 100%, 120V-277V, D2W; 800-2500 lumens and 98 CRI; 500-2000 lumens			
1DE010 = 0-10V Dimming, 0% to 100%, 120V, 98 CRI; 2500-4500 lumens		500-4,500	800-2,500
2DE010 = 0-10V Dimming, 0% to 100%, 277V, 98 CRI; 2500-4500 lumens			
3DE010 = 0-10V Dimming, 0% to 100%, 347V with step down transformer, D2W; 800-2500 lumens and 98 CRI; 500-4500 lumens			
D5LT=Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 120V-277V, D2W; 800-2500 lumens, 98 CRI; 500-2000 lumens			
1D5LT = Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 120V, 98 CRI; 2500-4500 lumens		500-4,500	800-2,500
2D5LT = Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 277V, 98 CRI; 2500-4500 lumens			
3D5LT = Fifth Light® (DALI T6) Logarithmic Dimming, 0% to 100%, 347V with step down transformer, D2W; 800-2500 lumens, 98 CRI; 500-4500 lumens			
DMX=DMX/RDM Logarithmic Dimming, 0% to 100%, 120V-277V, D2W; 800-2500 lumens and 98 CRI; 800-2000 lumens ⁽⁵⁾			
1DMX = DMX/RDM Logarithmic Dimming, 0% to 100%, 120V, 98 CRI; 2500-3000 lumens ⁽⁵⁾		800-3,000	800-2,500
2DMX = DMX/RDM Logarithmic Dimming, 0% to 100%, 277V, 98 CRI; 2500-3000 lumens ⁽⁵⁾			
3DMX = DMX/RDM Logarithmic Dimming, 0% to 100%, 347V with step down transformer, D2W; 800-2500 lumens and 98 CRI; 800-3000 lumens ⁽⁵⁾			
DMXC5=DMX/RDM Logarithmic Dimming, 0% to 100%, 120V-277V, RJ45 connection, D2W; 800-2500 lumens and 98 CRI; 800-2000 lumens ⁽⁵⁾			
1DMXC5 = DMX/RDM Logarithmic Dimming, 0% to 100%, 120V, RJ45 connection, 98 CRI; 2500-3000 lumens ⁽⁵⁾		800-3,000	800-2,500
2DMXC5 = DMX/RDM Logarithmic Dimming, 0% to 100%, 277V, RJ45 connection, 98 CRI; 2500-3000 lumens ⁽⁵⁾			
3DMXC5 = DMX/RDM Logarithmic Dimming, 0% to 100%, 347V with step down transformer, RJ45 connection, D2W; 800-2500 lumens and 98 CRI; 800-3000 lumens ⁽⁵⁾			
DLE=Lutron Ecosystem dimming 1% to 100%, 120V-277V, 25' Max remote length, D2W; 800-2500 lumens and 98 CRI; 800-2000 lumens			
1DLE = Lutron Ecosystem dimming 1% to 100%, 120V, 25' Max remote length, 98 CRI; 2500 lumens		800-2,500	800-2,500
2DLE = Lutron Ecosystem dimming 1% to 100%, 277V, 25' Max remote length, 98 CRI; 2500 lumens			
3DLE = Lutron Ecosystem dimming 1% to 100%, 347V with step down transformer, 25' Max remote length, D2W; 800-2500 lumens and 98 CRI; 800-2500 lumens			
DLV=Low voltage dimming driver (1-100%) for use with DLVP system, D2W, 800-2500 lumens and 98 CRI; 800-2000 lumens ⁽⁶⁾		800-2,000	800-2,500
DE010W2N2765=Tunable white 0-10V Dimming, 2700K-6500K, 0% to 100%, 120V-277V, 1000 lumens			
DE010W2N2050=Tunable white 0-10V Dimming, 2700K-6500K, 0% to 100%, 120V-277V, 1000 lumens			
D5LTW2N2765=Tunable white Fifth Light® (DALI T6) Dimming, 0% to 100%, 2700K-6500K, 120V-277V, 1000 lumens			
D5LTW2N2050=Tunable white Fifth Light® (DALI T6) Dimming, 0% to 100%, 2000K-5000K, 120V-277V, 1000 lumens			

Options ^{(10) (30) (32)}	Controls	
EMBOD =Bodine® Emergency Module with Remote Test Switch ⁽¹⁰⁾ EMBOD6ST =Bodine® 6W Self Test Emergency Module with Remote Test Switch EM7 =7W Emergency Module with Remote Test Switch EM14 =14W Emergency Module with Remote Test Switch	EMBOD7ST =Bodine® Self Test Emergency Module with Remote Test Switch EMV7 =7W Low Voltage Emergency Module with Remote Test Switch ⁽⁷⁾ EMV14 =14W Low Voltage Emergency Module with Remote Test Switch ⁽⁷⁾ ETRD =Emergency transfer device ⁽³¹⁾	WPST =Factory installed Wavelinx (includes control module, sensor, cable, tilemount and ceiling mount sensor) ^{(11) (13)} WLST =Factory installed WaveLinx LITE Sensor Kit ^{(11) (12)} WPW =WaveLinx PRO Wireless Node without sensor ⁽¹⁵⁾

Continued on next page.

Multi-line Order Information

Accessories (Order separately) ⁽²⁵⁾		
TRM6P =White metal trim ring ⁽²⁶⁾ LGSKT6IP66 =IP66 Gasket Kit DT6RF =6 inch frosted acrylic ring ⁽²⁸⁾	HSA6 =Slope Adapter for 6" Aperture Housings, Specify Slope ⁽³⁵⁾ Connected Lighting Systems ^{(6) (11)} WPST =Field installed WaveLinx sensor Kit ⁽¹³⁾ WLST =Field installed WaveLinx LITE Sensor Kit ⁽¹²⁾	Bar Hangers BAA-HB26 =C-channel Bar Hanger, 26" Long, Pair ⁽¹⁾ TAA-HB26 =C-channel Bar Hanger, 26" Long, Pair ⁽¹⁾ HB26 =C-channel Bar Hanger, 26" Long, Pair HB50 =C-channel Bar Hanger, 50" Long, Pair RMB22 =Wood Joist Bar Hanger, 22" Long, Pair
PRR6 =Rimless Plaster Ring ⁽²⁶⁾ RKP6 =Knife Edge plaster Ring ⁽²⁷⁾	Transformers H347 =H347 for 98CRI 4000 lumens and below; D2W 4500 lumens and below; W2N 4000 lumens and below H347200 =347 to 120V Step Down Transformer, 200VA	

Notes:
1. Only product configurations with these designated prefixes are built to be compliant with the Buy American Act of 1933 (BAA) or Trade Agreements Act of 1979 (TAA), respectively. Please refer to [DOMESTIC PREFERENCES](#) website for more information. Components shipped separately may be separately analysed under domestic preference requirements. Offered with spun aluminum narrow (N), medium (M) and wide (W) trims.

2. Nominal Lumens will vary depending on selected color, CRI, driver and reflector finish.

3. Product is marked spacing. [Reference table on page 4 for the spacing details.](#)

5. DMX fixtures default to full on upon loss of DMX signal.
6. Not available with Chicago Plenum.
7. ULus listed only

8. Offered up to 2500 lumens with D2W and 3500 with W2N
- D010, D5LT, D6010 up to 4500 lumens with 98 CRI
- D010TR, DMX up to 3000 lumens with 98 CRI
- DLE, DL2 up to 2500 lumens with 98 CRI

10. Not available for W2N

11. Refer to system specifications for additional information, features, and benefits. Order either factory installed option or accessory. Use with 0-10V driver.

12. WLST=WaveLinx LITE tilemount sensor kit for daylight dimming, PIR motion sensing, use with D010 only (Refer to WaveLinx LITE system specifications)

13. WPST=WaveLinx wireless sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with 0-10V only.

14. IC rated up to 2000 lumens for 98 CRI, 2500 lumens for D2W and 1000 lumens for W2N

15. WPN = WaveLinx PRO wireless node provides luminaire-level control with scene and zone configuration without an integrated sensor. Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with 0-10V driver only.

16. PS available in self-flanged MW finish only

17. Offered up to 2000 lumens

18. Flange is the same finish as the reflector

19. Requires knife edge ring accessory.

20. Anodized or spun reflectors

21. Die cast only

22. Available with narrow (N), medium (M) and medium 45 degree (MD) Spun Aluminum trims. Required for use with all IEMBOD, IEM7, IEM14, IEMV7 and IEMV14 housings. Not offered with remote driver.

23. Offered with DLVP up to 2000 lumens with 98 CRI.

24. Black or white paint.

25. Accessories sold separately will be separately analyzed under domestic preference requirements. Consult factory for further information.

26. Order trim with polymer trim ring (Consult specification sheet for color ordering information and options).

27. Order die cast trim with flange type 4

28. Order with self flanged trim.

29. If using remote driver order battery and controls with the remote driver.

30. 120V/277V

31. Used to bypass local control during outage. Must be used in conjunction with UL 1008 device (provided by others)

32. Non-IC

33. IC rated for 800 lumens

34. IC rated for 1000 lumens

35. Not recommended for use with Wall Wash