

PCL PENDANT LIGHT

DESCRIPTION

naturaLED® Pendant Light (PCL) fixture is a versatile and high performance fixture offering both precision lighting and elegant style and can be used for any new constructions, remodel, or retrofit projects. Adjustable mounting for flat or sloped ceiling, optional for purchase a pendant pole of 12" length or extension to 24" length. This classic cylindrical design with clear lens allowing a modern look with selectable wattages and 5 color temperatures illuminating for both residential or commercial use.

APPLICATIONS

Architectural, Perimeter, Commercial, Pathway

FEATURES

- Wet Location
- ETL Listed
- Wattage & Color Selectable
- Wattage: 18-30W
- Color Temp: CCT5 (27/30/35/40/50K)
- Voltage: 120-277V
- Surge Protection: 3.75KV
- Dimmable: 0-10V
- CRI: >90
- Operating temperature: - 4°F - 122°F
- Beam Angle: 50°
- Excellent thermal design
- Easy installation
- Warranty: 5 Year
- Optional Accessory for Purchase: 24" Pendant Rod, Emergency Battery Back Up Inverter 120-347V

PROJECT: _____

SCHEDULE: _____ DATE: _____

PREPARE BY: _____

NOTES: _____



Rated Life 50,000 Hours
Warranty 5 Years

OPTIONAL ACCESSORY



SAMPLE NUMBER FX4PCL30SW/50CL/9CCT5/BK/MV

FAMILY	DIAMETER	SERIES	WATTAGE	BEAM ANGLE	CRI/COLOR TEMP	COLOR	VOLTAGE
FX Fixture	4 4.5-inch	PCL Pendant Light	30SW 30 Selectable Wattages	50CL 50° Clear Lens	9CCT5 CRI 90 CCT5 (27/30/35/40/50K)	BK Black	MV Multiple Voltage



ORDERING

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Size	Wet Location
18	7047	FX4PCL30SW/50CL/9CCT5/BK/MV	CCT5	1,260	100	4.5"	•
24			(27/30/35/40/50K)	1,680			
30				2,100			

ACCESSORIES (Ordered Separately)

Emergency Driver



7337 BAEM25-170BC/347-C
(25W Micro Inverter 120-347 with 12" Conduit)




P10063 MT-PCL-ROD-BK-24IN
(Pendant Rod 24" (2 x 12"))



P10619 MT-PCL/CM/BK
(Surface Mount Plate)

DIMENSIONS

18W (4.5-inch)
2.65-lbs

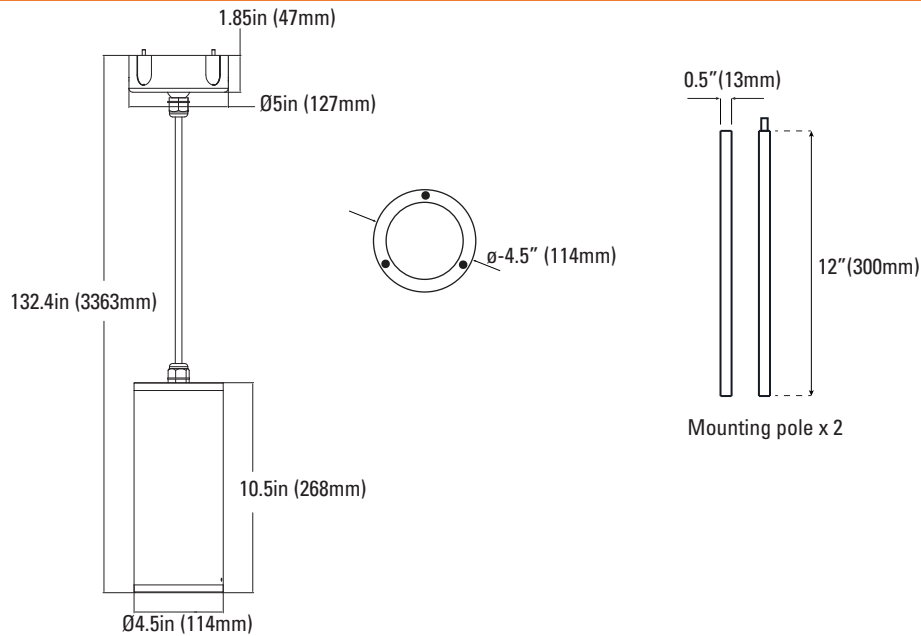

PACKAGE

Case Qty
6 pcs

