

PROJECT:

SCHEDULE:DATE:

PREPARE BY:

NOTES:

BFS

Bullet Floodlight (1/2" Knuckle)

DESCRIPTION

The naturaLED® Bullet Flood Light (BFS) is designed to deliver outstanding illumination performance for both landscape and security lighting applications. With a precise 40° beam angle distribution, it provides focused, high-intensity lighting to enhance visibility and safety in various outdoor environments. Engineered with an IP65 rating, this floodlight is built to withstand harsh weather conditions, ensuring long-lasting durability and reliable operation. The fixture features a 1/2" NPT knuckle mount, allowing for easy installation and adjustable positioning to direct light where it is needed most. Ideal for a wide range of applications, the BFS is perfect for illuminating perimeters, entryways, building facades, landscapes, retail centers, and residential complexes. Additionally, it serves as an excellent choice for architectural lighting, highlighting structures and outdoor features with precision and efficiency.

APPLICATIONS

Warehouses, Parking Garages, Area Lighting, Security Lighting, Pathway Lighting, Entryway Lighting

FEATURES

- IP65 Rated
- ETL/cETLus Listed
- Wattage: 10W, 20W
- Color Temp: 3000K, 4000K, 5000K
- Voltage: 120-277V
- Surge Protection: 2KV
- CRI: >80
- Operating Temperature: -22°F to 122°F
- Beam Angle: 40°
- Long Life LED Chips
- 1/2" NPT Threaded Knuckle Mount
- Material: Die Cast Aluminum
- Color: Bronze
- Warranty: 5-Year Limited Warranty



SAMPLE NUMBER		LED-FXBFS10/40/830/BZ-KNC					
STYLE	FAMILY	SERIES	WATTAGE	BEAM ANGLE	CRI/COLOR TEMP	COLOR	ACCESSORY
LED	FX Fixture	BFS BulleFloodlight	10 10 Watt	40 40°	830 CRI 80 3000K	BZ Bronze	KNC Knuckle Mount




*P= Premium DLC / *S = Standard DLC

ORDERING

Ordering Code	Description	Watts (W)	Lumens (Lm)	CCT (K)	Equiv. Wattage (W)	Voltage	Color	IP65 Rated
9291	LED-FXBFS10/40/830/BZ-KNC	10	900	3000K	100W	120-277V	Bronze	•
9295	LED-FXBFS10/40/840/BZ-KNC	10	900	4000K	100W	120-277V	Bronze	•
9292	LED-FXBFS10/40/850/BZ-KNC	10	900	5000K	100W	120-277V	Bronze	•
9293	LED-FXBFS20/40/830/BZ-KNC	21	1,800	3000K	150W	120-277V	Bronze	•
7045	LED-FXBFS20/40/840/BZ-KNC	21	1,800	4000K	150W	120-277V	Bronze	•
9294	LED-FXBFS20/40/850/BZ-KNC	21	1,800	5000K	150W	120-277V	Bronze	•


PACKAGE

	Master Carton (pc)	Dimensions (in)	Weight (lb)
10 Watt	10	7.68"x18.50"x8.27"	16.50
20 Watt	10	7.68"x18.50"x8.27"	16.50




DIMENSIONS

10 Watt/ 20 Watt
1.50-lbs


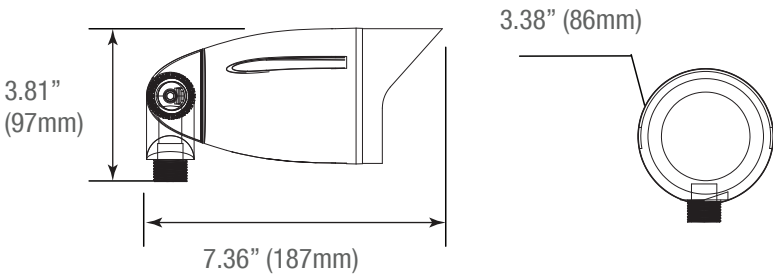


PHOTOMETRICS


10 Watt

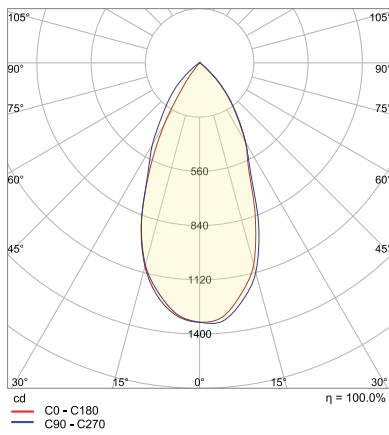

BUG rating B1 U0 G0

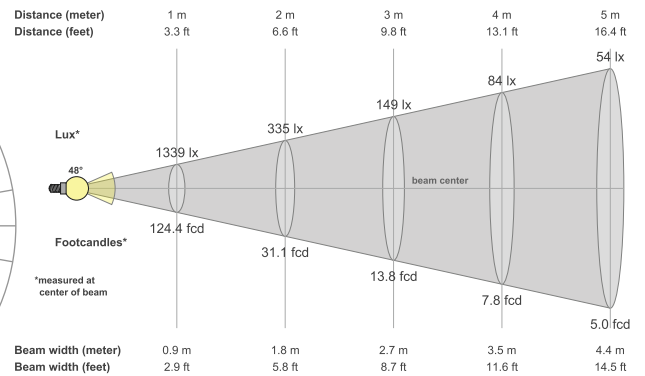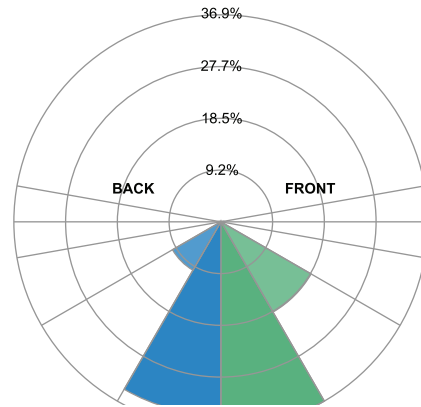

20 Watt

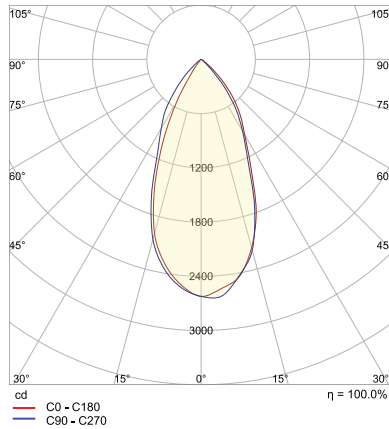

BUG rating B2 U0 G0

