

In-Wall Rated Wire

(item #DI-0825-S) 16/2 AWG by the 250' spool
(item #DI-0825-F) 16/2 AWG by the foot

(item #DI-0824-S) 18/2 AWG by the 250' spool
(item #DI-0824-F) 18/2 AWG by the foot

Hiding wire can be difficult when installing low-voltage lighting. For a low profile installation, you may choose to hide the wires behind a wall. The In-Wall Rated Wire is the best option for this low-voltage lighting configuration and is perfect for large or small remodels and upgrades. This Class 2 wire conforms to national electrical safety standards for in-wall lighting installation and is available in 16AWG and 18AWG (American Wire Gauge).

Note: Not for use in Wet Locations.

Conduit: High Purity, Oxygen-free Copper
Gauge: 16AWG/ 18AWG

Conductor Count: 2

Outer Diameter: 6.2mm (16AWG) , 5.2mm (18AWG)

Twist Type: Multi-twist, rope lay

Outer Jacket Color: White

Polarity Markers: Red & Black

Rip Cord: Nylon thread


Spark Test: 3.0KV/ Sec NOBREAKING

Cold Bend Test: - 10±1°C/4HR NO CRACKING

Heat Shock Test: 121±1°C/1HR NO CRACKING



Wire Detail

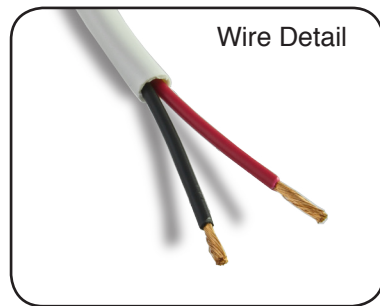

Conforms to the following standards:

NEC 725
Article 800

UL listed
CL2 rated

