




Pass & Seymour

Decorator Devices Specification Grade Switches Combination 15 & 20A, 120 & 277VAC

PS811-20, PS8111-20, PS8LM, TM8ID, TM811-DTMO, TM811-DTMA

Style, versatility and ease — all in a single decorator opening.

These combination switches are built for 20 amp applications and are ideal for any market. Combining decorator-style with smooth, consistent, long-term use, these durable combos feature a heavy-gauge plated steel strap for corrosion resistance. A snap-in light module to transform any of these switches into an illuminated version, and identification modules offer more versatility. Double throw momentary and maintained contact 15 amp styles are also available.

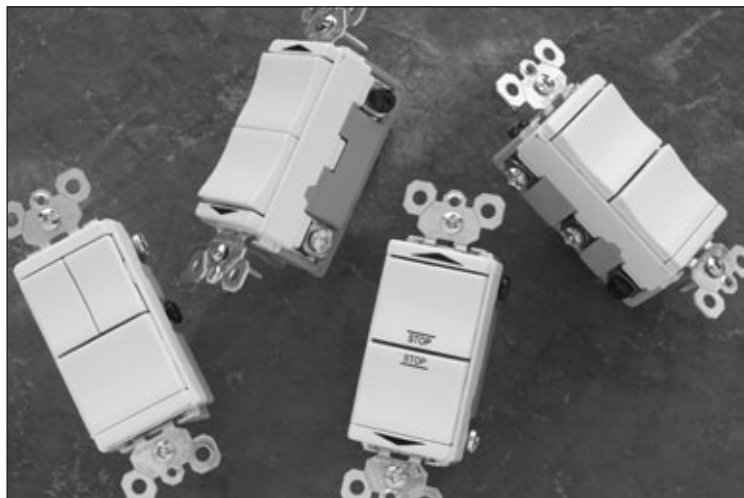

Features & Benefits

Unique "Up/Down" switches match the look and feel of standard decorator switches.

Patent-pending snap-in light module (sold separately) transforms a combination switch into an illuminated switch.


Identification modules (sold separately) identifies each switch — light, fan, heat lamp.

Full wraparound heavy-gauge steel strap is plated for corrosion resistance and features lock-in tabs.

Patent-pending split circuit tab — easily accessible, and can be reinstalled without a tool.

Impact-resistant face and body.

Side and external screw-pressure-plate back wire accepts #12 and #14 AWG. All screws are tri-drive.

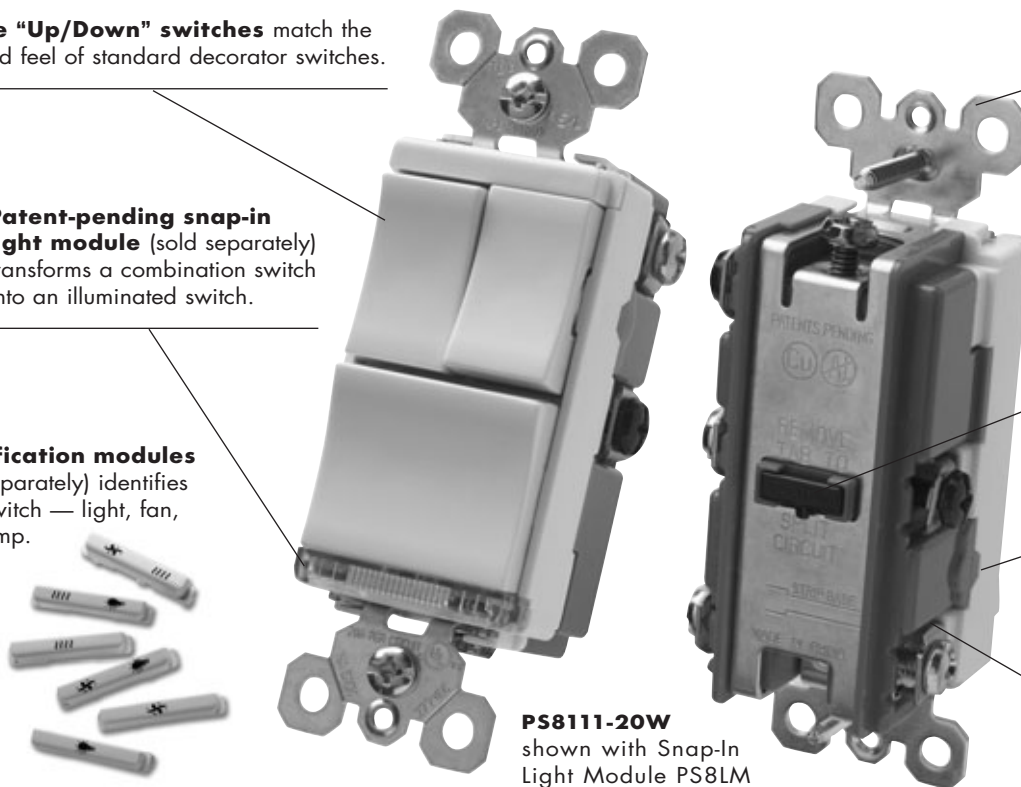

Field Uses/Vertical Markets

- | | | |
|-----------------|---------------|-------------|
| ■ Industrial | ■ Health Care | ■ Education |
| ■ Institutional | ■ Retail | ■ Office |

SF906R2 — Updated March 2005 — For latest specs visit www.legrand.us/passandseymour



Pass & Seymour

Decorator Devices Specification Grade Switches Combination 15 & 20A, 120 & 277VAC

Ordering Information

Catalog Number	Rating A. VAC		Color
Two Single Pole Switches			
PS811-20I	20	277	Ivory
PS811-20W	20	277	White
PS811-20LA	20	277	Light Almond
Three Single Pole Switches			
PS8111-20I	20	277	Ivory
PS8111-20W	20	277	White
PS8111-20LA	20	277	Light Almond
Snap-In Light Module*			
PS8LM	—	—	Clear
Identification Modules*			
TM8ID-ICC	—	—	Ivory
TM8ID-WCC	—	—	White
TM8ID-CC	—	—	Brown
TM8ID-BKCC	—	—	Black
TM8ID-LACC	—	—	Light Almond

*For use with PS811-20 and PS8111-20.

Catalog Number	Rating A. VAC		Color
Double Throw Momentary Contact			
TM811-DTMOI	15	120	Ivory
TM811-DTMOW	15	120	White
TM811-DTMOLA	15	120	Light Almond
Double Throw Maintained Contact			
TM811-DTMAI	15	120	Ivory
TM811-DTMAW	15	120	White
TM811-DTMALA	15	120	Light Almond

For more information on these and other P&S products refer to our Product Guide or visit our web site.

SF906R2 — Updated March 2005 — For latest specs visit www.legrand.us/passandseymour

Decorator Devices Specification Grade Switches Combination 15 & 20A, 120 & 277VAC



Pass & Seymour

Technical Specifications

3rd Party Compliance

PS811-20, PS8111-20, TM811-DTMA: cULus Listed, File Number E140597, Standard UL20, General Use Snap Switches.
TM811-DTMO: cULus Listed, File Number E31169, UL508, Industrial Control.

Performance

Electrical

Maximum Amperage per Circuit	PS811-20 and PS8111-20 = 20A
Maximum Amperage per Device	PS811-20 = 30A, PS8111-20 = 35A
Dielectric Withstand Voltage	1500V Minimum
Maximum Working Voltage	PS811-20 and PS8111-20 = 277VAC TM811-DTMO and TM811-DTMA = 120VAC
Overload	Minimum 4.8 times rated current for 100 cycles
Temperature Rise	30°C maximum at rated current
Maximum Continuous Current	PS811-20 and PS8111-20 = 277VAC TM811-DTMO and TM811-DTMA = 120VAC

Mechanical

Terminal Accommodation	#14 AWG – #10 AWG
Product Identification	Amperage, Voltage, 3rd Party Compliance

Environmental


Flammability	UL94 V2
Operating Temperature	Maximum continuous +115°C, minimum -40°C

Materials

Back Body	Polycarbonate	Pressure Plate	Steel
Frame	Polycarbonate	Contacts	Silver Cadmium Oxide
Paddle	Thermoplastic	Spring	Zinc-Plated Steel
Terminals	Brass	Ground Terminal	Brass
Terminal Screws	Tri-Drive Brass-Plated Steel	Ground Screw	Tri-Drive Zinc-Plated Steel
Strap	Steel		

Warranty

1 Year



Dimensions for
15 & 20 Amp




Momentary
Contact




Maintained
Contact

Complimentary Devices & Accessories

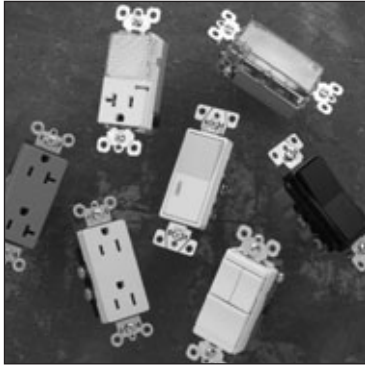


DECORATOR DEVICES

- Construction Grade Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Specification Grade Hallway Lights

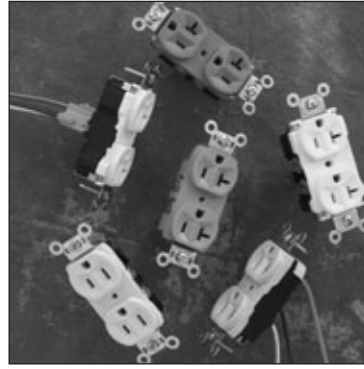


STRAIGHT BLADE RECEPTACLES

- Plug Tail™
- Extra Heavy-Duty
- Heavy-Duty
- Construction Grade
- Construction Grade Leaded
- Commercial Grade

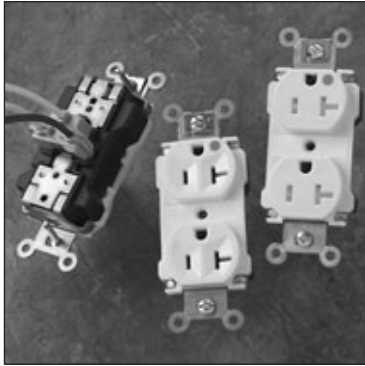


PLUGTAIL™ DEVICES

- Extra Heavy-Duty Spec Grade
- Extra Heavy-Duty Hospital Grade
- Extra Heavy-Duty Tamper-Resistant
- Extra Heavy-Duty Tamper-Resistant Hospital Grade

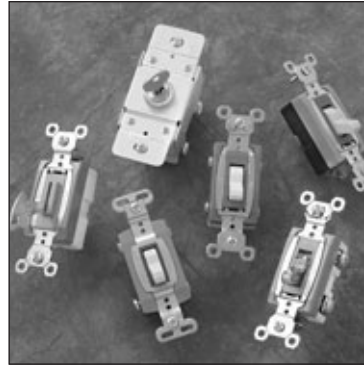

SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle

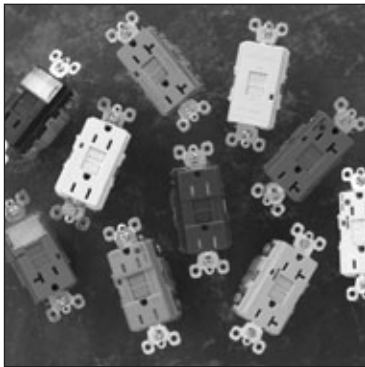

GFCIs

- Specification Grade
- Hospital Grade
- Dead Front



WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

Also available...

- | | | | |
|--------------------------|--------------------------------------|-------------------------------|-------------------------------|
| ■ Light Almond Devices | ■ TVSS & Isolated Ground Devices | ■ Turnlok® Locking Devices | ■ IEC 309 Industrial Products |
| ■ Hospital Grade Devices | ■ Ground Continuity Monitoring (GCM) | ■ Weatherproof Boxes & Covers | ■ Flexcor® Wire Mesh Grips |
| | ■ Straight Blade Plugs & Connectors | | ■ Configurable Solutions |



Legrand/Pass & Seymour
P.O. Box 4822
Syracuse, NY 13221-4822
800-223-4185

North America Headquarters
60 Woodlawn Street
West Hartford, CT 06110
Phone: 1.877.BY.LEGRAND (295.3472)
Fax: 1.860.232.2062
www.legrand.us

Legrand Canada
570 Applewood Crescent
Vaughan, ON, L4K 4B4
Phone: 905.738.9195
Fax: 905.738.9721
www.legrand.ca