

PROJECT:	TYPE:
LOCATION:	CAT:

Description

HD Connectors for Trulux tape light make splicing, jumping or connecting power easy and quick. In just a few simple steps, connect tape light without the need of stripping or soldering wire.

Features

- IP20 rated connector compatible with IP20 and IP54 Trulux tape
- HD snap connectors available in feeds, splices, and jumpers
- Compatible with a variety of Trulux tape light (sold separately)
- Works with 18 to 22 AWG wire (5 wire and 6 wire requires 22 AWG)
- Maximum 4A capacity (3.3A for 6 wire)

Mounting

Surface mount via attached 3M adhesive tape. (Not Supplied)


Applications

Use with Trulux single color, Tunable CCT, RGB, and RGBW tape light





Dimensions


Single Color (2-Wire)

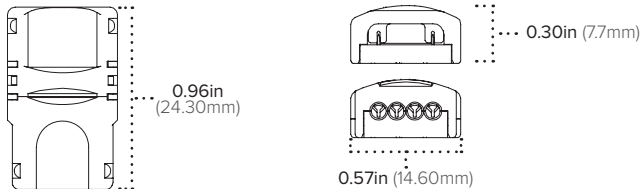


Tunable CCT (3-Wire)

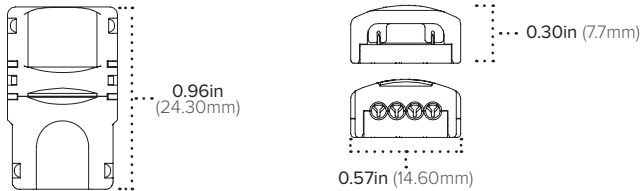


RGB (4-Wire)

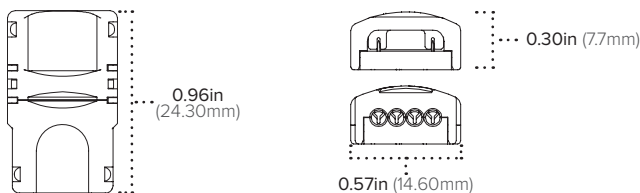

RGBW (5-Wire)

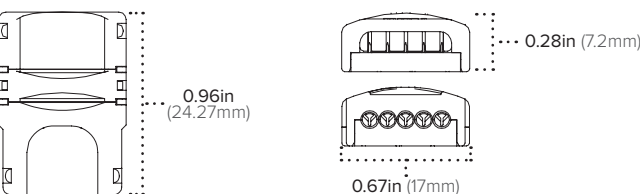


RGBTW (6-Wire)

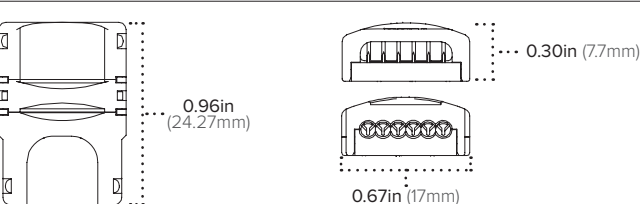

Ordering Information

Single Color (2-Wire)

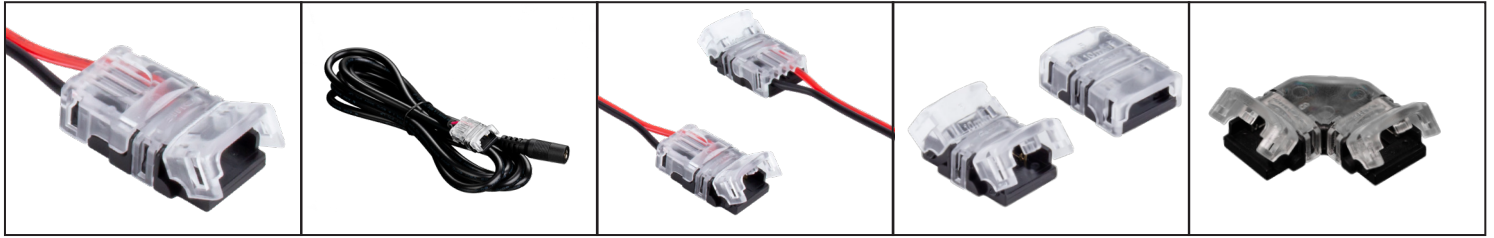

HD Power Feed (2-Wire)
TL-2PWR-HD


HD Power Feed (2-Wire)
w/DC Barrell
TL-2PWR-HD-DC

HD Linking Cable (2-Wire)
TL-2JUMP6-HD (6")
TL-2JUMP24-HD (24")

HD Splice (2-Wire)
TL-2SPL-HD

HD "L" Splice (2-Wire)
TL-2SPL-L-HD

Tunable CCT & RGB (3-Wire & 4-Wire)

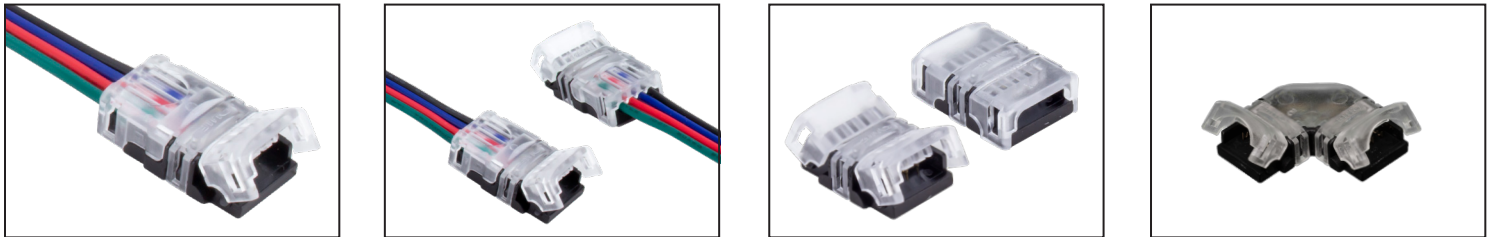

HD Power Feed (4-Wire)
TL-4PWR-HD

HD Linking Cable (4-Wire)
TL-4JUMP6-HD (6")
TL-4JUMP24-HD (24")


HD Splice (4-Wire)
TL-4SPL-HD

HD "L" Splice (4-Wire)
TL-4SPL-L-HD

RGBW (5-Wire)



HD Power Feed (5-wire)
TL-5PWR-HD




HD Linking Cable (5-wire)
TL-5JUMP6-HD (6")
TL-5JUMP24-HD (24")




HD Splice (5-wire)
TL-5SPL-HD

RGBTW (6-Wire)



HD Power Feed (6-wire)
TL-6PWR-HD



HD Linking Cable (6-wire)
TL-6JUMP6-HD (6")
TL-6JUMP24-HD (24")



HD Splice (6-wire)
TL-6SPL-HD