



Color: Bronze

Weight: 4.5 lbs

Project:

Type:

Prepared By:

Date:

**Driver Info**

Type	Constant Current
120V	0.15A/0.16A/0.17A/0.39A/0.40A
208V	0.10A/0.11A/0.22A/0.23A
240V	0.09A/0.10A/0.19A/0.20A
277V	0.08A/0.17A/0.18A
Input Watts	18-47.6W

**LED Info**

Watts	48W
Color Temp	2700-5000K Tunable White; RGBW 16+ Million Colors
Color Accuracy	81-85 CRI
L70 Lifespan	100,000 Hours
Lumens	181-4279 lm
Efficacy	9.1-92.6 lm/W

**Technical Specifications**

**Lightcloud**

**Lightcloud Blue:**

Lightcloud Blue is a Bluetooth Mesh wireless lighting control system that allows you to control RAB's various compatible devices. With RAB's patented Rapid Provisioning technology, devices can be quickly and easily commissioned for residential and large commercial applications using the Lightcloud Blue mobile app. Each device in a system can communicate with any other device, eliminating the need for a Gateway or Hub and maximizing the control system's reach.

DLC system - Interior: N1XMLOEATBA; Exterior: NHCZ2BIA17L

Learn more at [www.lightcloud.com](http://www.lightcloud.com).

**Gateway Required:**

No

**Communication Protocol:**

Bluetooth Mesh

**Range:**

Indoor: Up to 60 feet between standard building materials. Building materials such as brick, concrete, and steel construction may require additional Lightcloud Blue devices to extend around an obstruction; Up to 200 feet clear line of sight.

Outdoor: Up to 60 feet clear line of sight; Up to 18 feet around corners

**Spacing Criteria:**

Lightcloud Blue devices should be placed within the specified range to communicate within the Bluetooth Mesh network.

**SmartShift**

**SmartShift:**

SmartShift is the most advanced - yet easiest to use - circadian lighting system, which syncs white color tuning with the local sunrise and sunset. Requires the NANO/LCB (sold separately)

**Field Adjustability**

**Field Adjustable:**

Field Adjustable Light Output:  
Color temperature: 2700-5000K Tunable White; RGBW 16+ Million Colors  
Optics: 16°/34°/48° Beam Angle Adjustable (Factory Setting: 34°)

**Compliance**

**UL Listed:**

Suitable for wet locations

**IP Rating:**

Ingress protection rating of IP65 for dust and water

**IESNA LM-79 & LM-80 Testing:**

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

**Trade Agreements Act Compliant:**

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

**LED Characteristics**

**LEDs:**

Long-life, high-efficacy, discrete, surface-mount LEDs

**Color Consistency:**

7-step MacAdam Ellipse binning to achieve consistent fixture-to-fixture color

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for (SSL) Products, ANSI C78.377-2017.

**Electrical**

**Driver:**

Constant Current, Class 2, 120-277V, 50/60 Hz 120V: 0.40A, 208V: 0.24A, 240V: 0.20A, 277V: 0.18A

## Technical Specifications (continued)

**Dimmable:**

Yes, via the Lightcloud Blue mobile app and devices. This fixture will not operate properly when connected to a standard (incandescent) dimmer or dimming control.

**Dim to Off:**

No

**Aux Power Supply:**

No

**Surge Protection:**

L-N, L-PE, N-PE: 4 kV

---

**Performance****Lifespan:**

100,000-Hour LED lifespan based on IESlm-80 results and TM-21 calculations

---

**Construction****Cold Weather Starting:**

The minimum starting temperature is -40°F (-40°C)

**Maximum Ambient Temperature:**

Suitable for use in up to 104°F (40°C)

**Housing:**

Die-cast aluminum

**Tilt Increment:**

Rotates in 2 degree increments

**Lens:**

Glass

**Reflector:**

Polyethylene Terephthalate (PET)

**Gaskets:**

Silicone and Nitrile rubber

**Finish:**

Formulated for high durability and long-lasting color

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

---

**Installation****Mounting:**


Knuckle arm mount

---

**Other****5-Year Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).

Dimensions

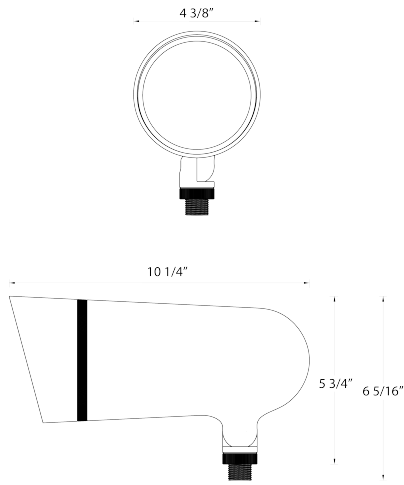

Features

- 100,000-Hour LED lifespan
- IP65 rating protects against dust and water
- 5-Year, limited warranty

Ordering Matrix

Family	Wattage	Mounting	Color Temp	Optics	Finish
LFX	L				
	S = Small, 13W L = Large, 48W	Blank = Knuckle Arm	Blank = 2700-5000K Tunable White, RGBW 16+ Million Colors	Blank = Flood/Spot/Narrow Beam Angle Adjustable	Blank = Bronze W = White B = Black