

NX-606-LED
Die-Cast LED Exit Signs with Battery Backup
Source: 2.3W

Table with 2 columns: Label (Type, Project, Catalog No., Notes) and Value.

PRODUCT DESCRIPTION
Die-cast aluminum low-profile LED exit signs are as brilliant and visible as standard incandescent signs, yet use a fraction of the power. LED light sources require no maintenance for 25 years-saving greatly on maintenance and upkeep costs. Exit signs are ideal for commercial and industrial standard non-emergency applications where low maintenance and operating costs are a must.

Die-cast exit sign utilizing Light Emitting Diode (LED) modules as the primary light source for economy operation. Exit sign includes a backup NiCad battery for 90-minute operation under emergency applications where the primary power source has been interrupted or terminated.


ELECTRICAL
Voltage: 120/277VAC dual input
Wattage: 2.3W
Light Source: LED
Operating Temperature: 10°C to 40°C (50°F to 104°F)
Circuitry Protection: Short circuit protection. Brown-out protection.

Construction: Brushed, die-cast aluminum, low-profile, snap-together housing constructed of 20-gauge steel. Snap-out knockouts for wiring.
Face: Two front faces sent with the dual face unit, One face plate sent with the single face unit. 6" high text with color diffusion.
Mounting: Exit sign can be mounted on a wall, side, or ceiling (all mounting hardware included).
Battery: Replaceable NiCad battery offers 90-minute emergency operation on a fully charged battery.
Testing: High-charge / ready operation indicator light and test button.

LABELS AND LISTINGS
5-Year Limited Warranty
UL Listed
NFPA
NEC
Certified to the energy efficiency standards of California Title 20



PRODUCT IMAGES AND DIMENSIONS

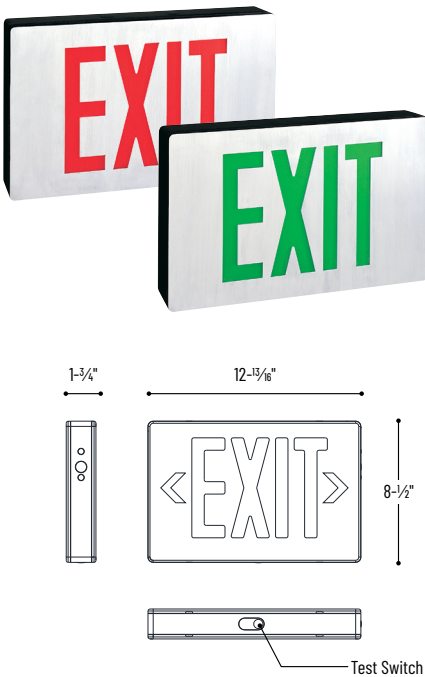

Die-Cast LED Exit Signs with Battery Backup

Table with 2 columns: Letter Color / Housing Color and Faces. Rows include NX-606-LED/R (Red Letters / Black Housing) and NX-606-LED/G (Green Letters / Black Housing) with their respective face options.

Replacement Battery

Table with 2 columns: Description. Rows include NEB-NICAD6 (Replacement Ni-Cad Battery for NX-606-LED/R) and NEB-NICAD7 (Replacement Ni-Cad Battery for NX-606-LED/G).

Example: NX-606-LED/R = 6" Red Letters Die-Cast LED Exit Sign with Battery Backup, Single Face, Black Housing