

DESCRIPTION

The naturaLED® SCM fixtures feature an IP65-rated, low-profile design with a durable die-cast aluminum housing and a shatter-resistant polycarbonate prismatic lens. Combining aesthetics with functionality, these fixtures offer selectable wattages and color temperatures for versatile lighting solutions. Designed for flexibility, the SCM can be installed via direct surface mounting on ceilings or walls or through pendant mounting, which accommodates a 3/4" NPT thread and is compatible with various junction box types.



APPLICATIONS

Warehouses, Parking Garages, Offices, Factories, Hospitals, Hotels



Rated Life Hours 50,000
Warranty 5 Years

FEATURES

- DLC Premium
- IP65 Rated
- ETL/cETL Listed
- Wattage & Color Selectable
- Wattage: 28~60W, 60~100W
- Color Temp: CCT3 (30/40/50K)
- Voltage: 120-277V
- Surge Protection: 4KV
- Dimmable: 0-10V
- CRI: >80
- Operating Temperature: -40°F to 122°F
- Beam Angle: 160°
- 1/2" Conduit on 3-sides
- Lens: Polycarbonate Lens
- Material: Die Cast Aluminum
- Color: Black / White
- Optional Accessories for Purchase: Microwave Sensor, Frosted & Drop Lens, Photocell Sensor, Emergency Driver, Beauty Plate, Wire Guard
- Warranty: 5-Year Limited Warranty

ACCESSORIES

	Emergency Driver
	Motion Sensor
	Beauty Plate
	Drop Lens
	Frosted Lens
	Surge Protector
	Photocell
	Wireguard

SAMPLE NUMBER

FX10SCM60SW/8CCT3/BK

FAMILY	SIZE	SERIES	WATTAGE	CRI/COLOR TEMP	COLOR
FX	10	SCM	60SW	8CCT3	BK
Fixture	10-inch	Slim Canopy	<60 Selectable Wattage	CRI 80 3CCT (3000/4000/5000K)	Black



ORDERING

*P= Premium DLC / *S = Standard DLC

Ordering Code	Description	Watts (W)	Lumens (Lm)	CCT (K)	Equiv. Wattage (W)	Voltage	Color	IP65 Rated	DLC (S/P)
9545	FX10SCM60SW/8CCT3/BK	28	3,584	3CCT	100-250W	120-277V	Black	•	P
		45	5,760	(30/40/50K)					
		57	7,318						
9547	FX10SCM60SW/8CCT3/WH	28	3,584	3CCT	100-250W	120-277V	White	•	P
		45	5,760	(30/40/50K)					
		57	7,318						
9546	FX13SCM100SW/8CCT3/BK	60	7,506	3CCT	>400W	120-277V	Black	•	P
		80	10,008	(30/40/50K)					
		100	12,533						

ACCESSORIES

**Motion Sensor****P10438 SEN-HB001VCR-1**

(Microwave Motion Sensor 0-10V Internal 12V)

**Frosted Lens****P10125 LENS-SCM/FR9X9**

(Frosted Lens for SCM for 10")

**Emergency Driver****7336 BAEM4-60BC/MV-A**

(Emergency Driver for 60SW-10")

**Drop Lens****P10126 LENS-SCM/DR9X9**

(Drop Lens for SCM for 10")

**7334 BAEM15-48BC/MV-A**

(Emergency Driver for 100SW-13")

**Surge Protector****P10389 SPD-L-10KV-277**

(Surge Protection 10KV 120-277V)

**Photocell****P10036 SEN-PHO-BT-MT/MV**

(Button Photocell 120V-277)

P10390 SPD-L-20KV-277

(Surge Protection 20KV 120-277V)

P10391 SPD-L-20KV-480


(Surge Protection 20KV 347-480V)

**Beauty Plates****P10195 PLT-SCM/14X14/WH**

(14"x14" Beauty Plate used with SCM)

P10196 PLT-SCM/24X24/WH

(24"x24" Beauty Plate used with SCM)

**Wireguard****P10574 WG-SCM10**


(Wireguard for 10" SCM)

P10575 WG-SCM13


(Wireguard for 13" SCM)

DIMENSIONS


60SW - 10"x10"
5.51-lbs

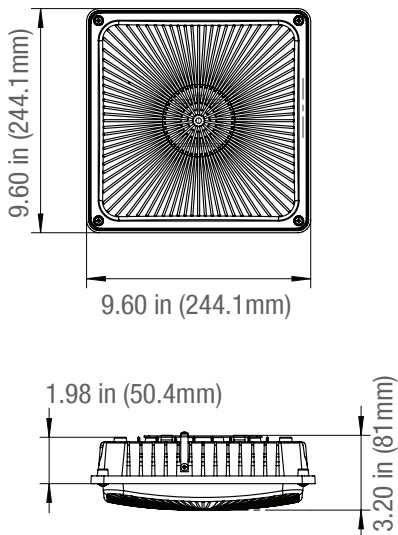


100SW - 13"x13"
7.72-lbs

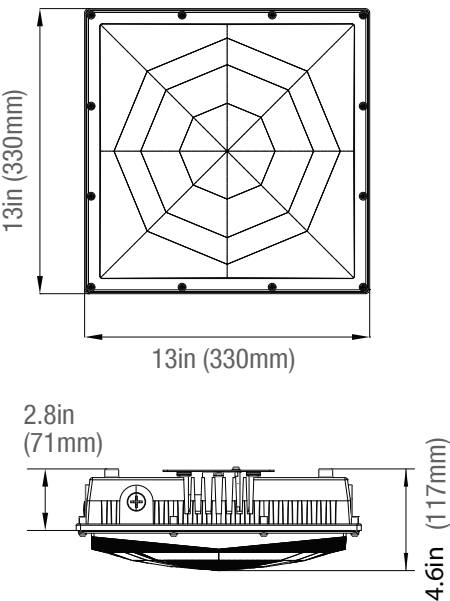

60SW with Frosted Lens Cover (P10125)

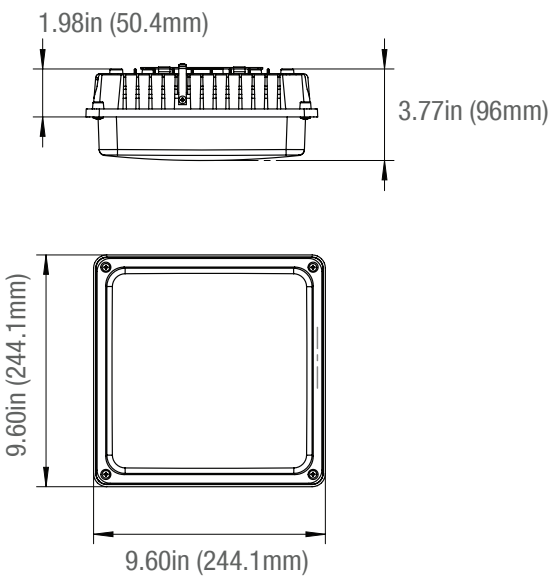


60SW with Drop Lens (P10126)

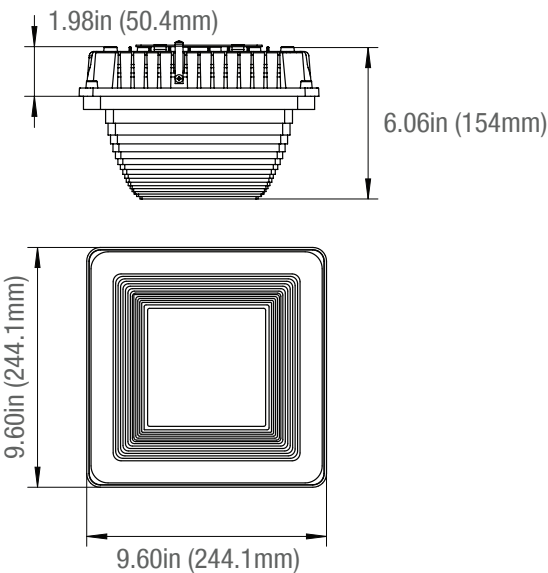


DIMENSIONS

Wireguard for 10" SCM

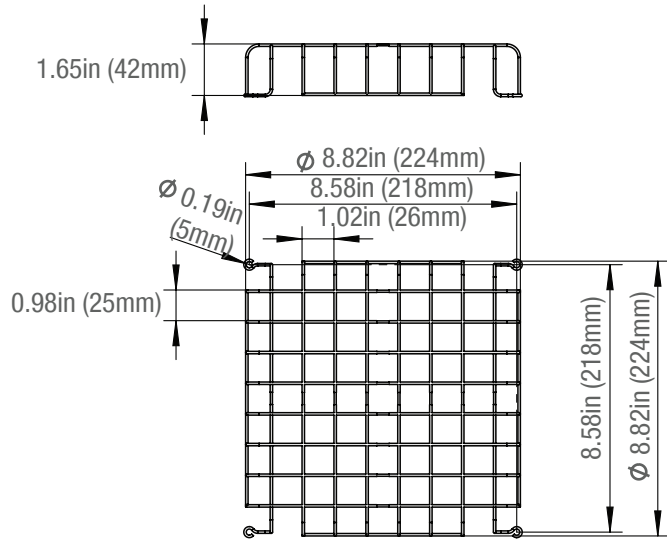


Wireguard for 13" SCM

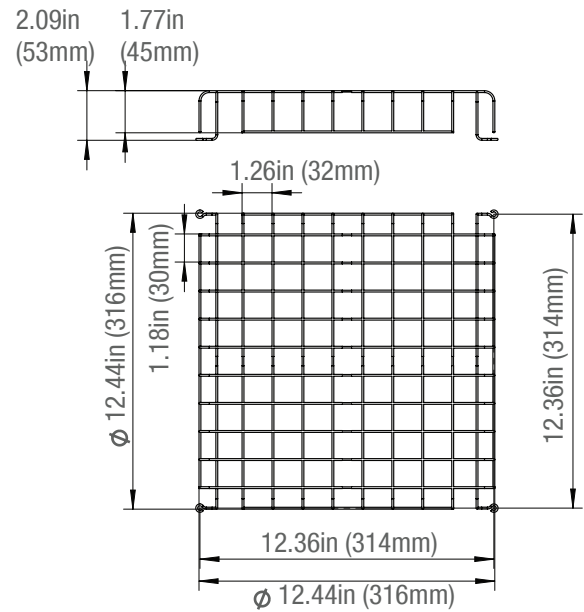


PACKAGE

	Master Carton (pc)	Dimensions (in)	Weight (lb)
10"x10"	1	10.20"x10.20"x4.10"	4.10
13"x13"	1	14.76"x14.76"x6.38"	6.38




PHOTOMETRICS


60 S/Wattage

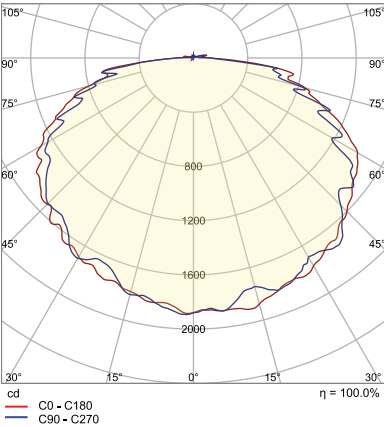



P10125 Frosted Lens

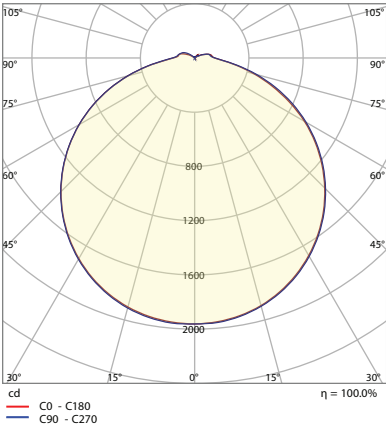


P10126 Drop Lens

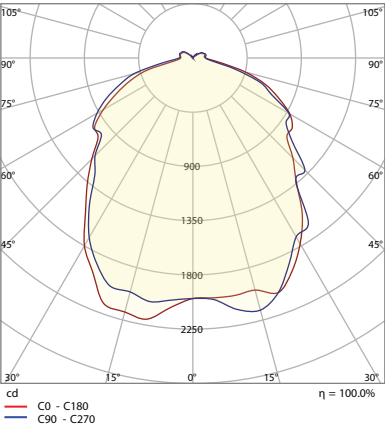

BUG rating B2 U3 G2

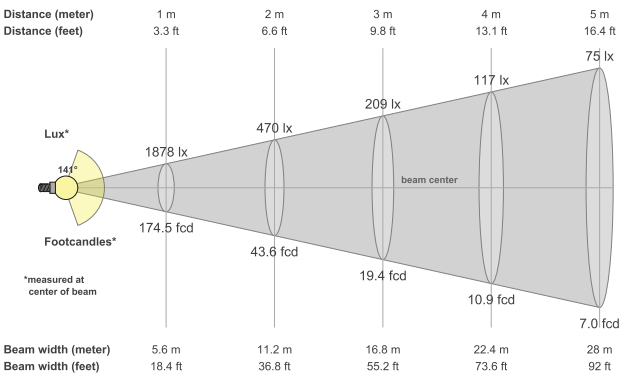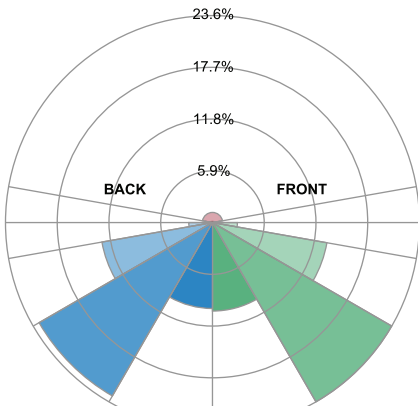

100 S/Wattage

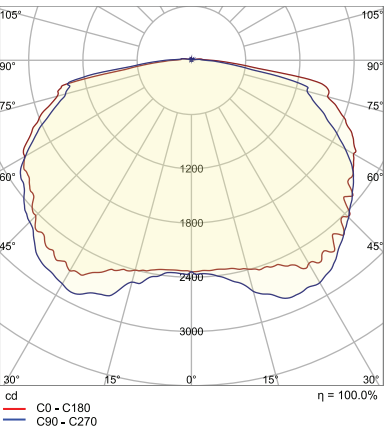

BUG rating B3 U3 G3

