

T5020-W



Tamper-Resistant Single Receptacle, 20 Amp, 125 Volt

Single Receptacle Outlet, Commercial Specification Grade, Tamper-Resistant, Smooth Face, 20 Amp, 125 Volt, Back and Side Wire, NEMA 5-20R, 2-Pole, 3-Wire - White

Technical Information

AC Horsepower Ratings

At Rated Voltage : 1 HP

Electrical Specifications

Amperage : 20 A

Current Limiting : Full Rated Current

Dielectric Voltage : Withstands 2000V per UL498

Pole : 2

Temperature Rise : Max 30C after 250 cycles OL at 200 percent rated current

Voltage : 125 VAC

Wire : 3

Environmental Specifications

Operating Temperature : -40° C to 60°C

Material Specifications

Body Material : Thermoplastic Nylon

Clamp Nuts : Zinc-Plated Steel

Color : White

Face Material : Thermoplastic Nylon

Ground Clips : Brass-Plated

Grounding Screw : Brass 8-32

Line Contacts : Brass Triple-Wipe

Strap Material : Zinc-Plated Steel

Terminal Screws : Brass 10-32

Mechanical Specifications

Product ID : Ratings are permanently marked on device

Screw Terminal Torque : 14-18 in-lbs

Terminal Accom. : 14-10 AWG

Terminal ID : Brass-Hot, Green-Ground, Silver-Neutral

Product Features

Color : White

Device Type : Single Receptacle Outlet

Feature : Tamper-Resistant|Smooth Face

Grade : Commercial Specification Grade

NEMA : 5-20R


Color :  White

UPC Code : 078477381809

Country Of Origin : Mexico

NEMA :  5-20R

Available Colors :

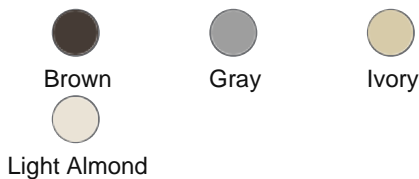

Termination : Back and Side Wire

Standards and Certifications

ANSI : C-73

CSA C22.2 No. 42 : File 152105


NEMA : WD-6

NOM : 057

UL498 : File E13399

Warranty : 10-Year Limited

Wiring Diagram

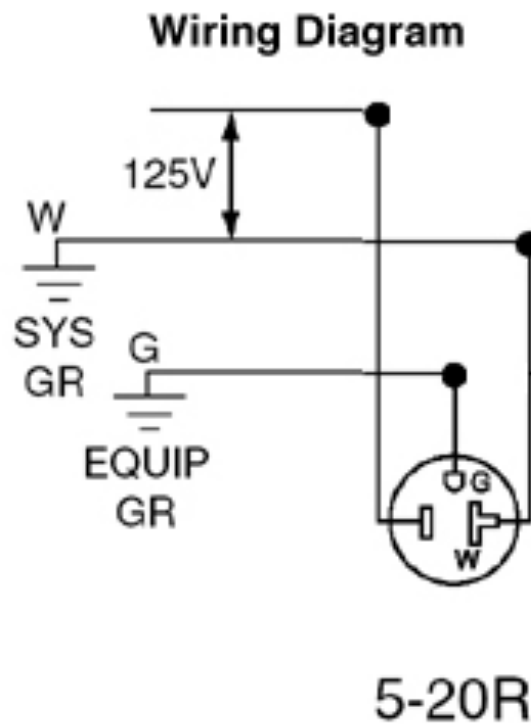

SPECIFICATION SUBMITTAL

JOB NAME: <input type="text"/>	CATALOG NUMBERS: <input type="text"/>	<input type="text"/>
JOB NUMBER: <input type="text"/>	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.

T. Monday-Friday): +1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-461-2002 ·

FAX: +1-800-824-3005 ·

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52) 5386- 1797 ·

Visit our Website at: www.leviton.com

© 2026 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/company/about-leviton/locations

© 2026 Leviton Manufacturing Co., Inc.