

PARTS LIST:

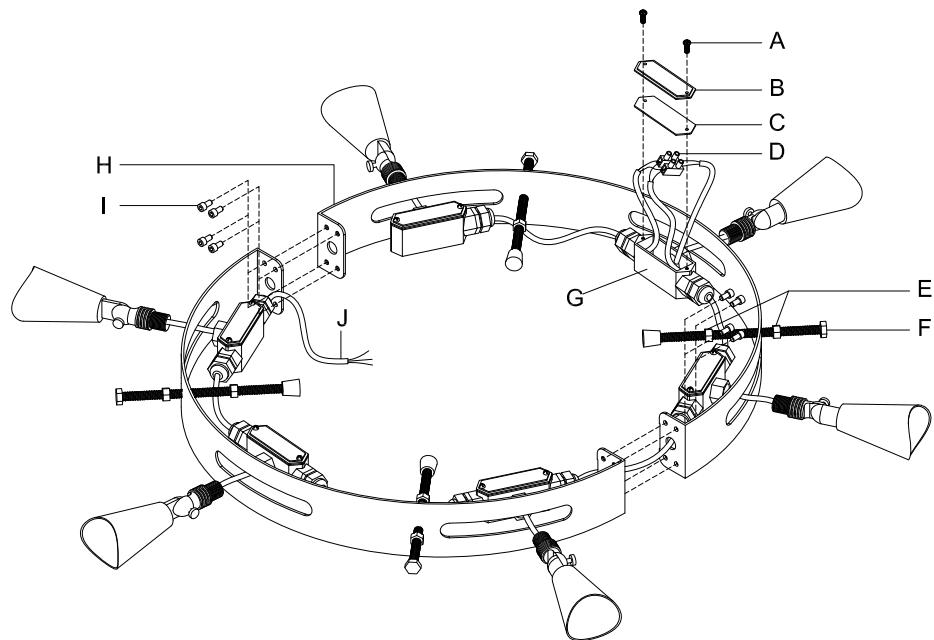
CAUTION: Make sure all parts have been accounted for prior to discarding carton and packing materials.

- A. Cap Screw
- B. Junction Box Cover
- C. Waterproof Gasket
- D. Wire Connector
- E. Hex Nut
- F. Threaded Rod
- G. Junction Box
- H. Tree Ring
- I. Hex Socket Screw
- J. 30' Black Power Cord

IMPORTANT GENERAL SAFEGUARDS:

CAUTION: To avoid the possibility of electric shock, make sure to unplug or turn off power supply before installation.

- Review the diagrams thoroughly before installation.
- Installation and electrical connections must be done in accordance with National Electrical and local codes, and should be performed by a qualified, licensed electrician.
- The use of accessory equipment not recommended by the original manufacturer may cause an unsafe condition.
- Do not use this equipment for other than intended use.
- All servicing should be performed by qualified personnel only.

**Installation Instructions:**

1. Prepare all the parts as per PARTS LIST.
2. Unscrew the cap screws(A) on the junction boxes(G), then remove the junction box covers(B) and waterproof gaskets(C).
3. Assemble the fixtures to the junction boxes(G):
Connect the fixture wires one by one on the wire connector(D) - observe correct polarity while wiring.
4. Tuck the wire connectors(D) into the junction boxes(G), place the waterproof gasket(C) and the box cover(B) in position, and secure them with the cap screws(A) provided.
5. Place the tree ring(H) around the trunk and fasten the two halves securely w/ the hex socket screws(I).
6. Adjust the threaded rods(F) to secure the tree ring(H) in place , then use the hex nuts(E) to lock and fasten the threaded rod(F) to the tree ring(H).
7. Connect the power cord(J) to the main power supply, then turn on.

