

GENERAL SPECIFICATION

LED: High efficiency +90CRI mid-power LEDs are field serviceable. Universal voltage.



LED Dimming: Standard 1% 0-10V dimming. TRIAC, DALI, or DMX available upon request.

Acrylic: White acrylic with seam is UL-94 HB Flame Class rated.

Cable Hanger: Comes with 72" cable and white cord for on-site adjustability.

Finish: Highly durable oven cured no VOC premium powder coat. Fixture painted textured white.

Surge Protection: External surge protector provided as standard.

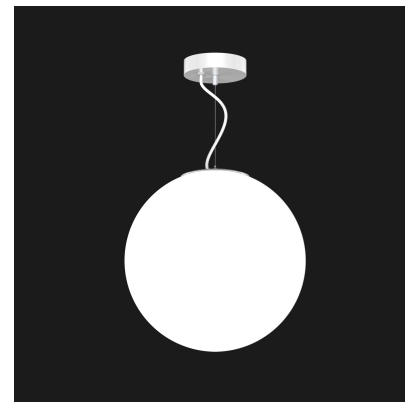

SAMPLE CATALOG NUMBER: GL-2801-						F-	1-	A
MODEL NO.						LAMPING	HANGER	OPTIONS
GL-2800	W in	18"	mm	460		A. 26LED30	1. Cable 	A. No Options
	20lbs B in	18"	mm	460		B. 26LED35		LC. 150" Cord & Cable
	9kg H in	24"-84"	mm	610-2135		C. 26LED40		Fixture supplied with 150" of cable and standard white cord.
Fixture Painted Textured White								EL. Emergency LED
GL-2801	W in	24"	mm	610		E. 39LED30		Remote mount up to 10' from light source in controlled environment with an area temperature range of 32°-131°F. Specify 120 or 277 voltage.
	30lbs B in	24"	mm	610		F. 39LED35		
	13.5kg H in	30"-90"	mm	760-2285		G. 39LED40		
Fixture Painted Textured White								
GL-2802	W in	30"	mm	760		I. 52LED30		
	40lbs B in	30"	mm	760		J. 52LED35		
	18kg H in	36"-96"	mm	915-2440		K. 52LED40		
Fixture Painted Textured White								

All Dimensions are nominal.

Light Source Definition

Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin	Code	Total Wattage	CRI	Rated Life Hrs	Delivered Lumens	Kelvin
26LED30	26	+90	50000	2844	3000	52LED30	52	+90	50000	6321	3000
26LED35	26	+90	50000	2844	3500	52LED35	52	+90	50000	6321	3500
26LED40	26	+90	50000	2844	4000	52LED40	52	+90	50000	6321	4000
39LED30	39	+90	50000	4912	3000						
39LED35	39	+90	50000	4912	3500						
39LED40	39	+90	50000	4912	4000						

Universal Voltage unless otherwise specified.

Contact factory for availability of other lamp configurations.