

OWP-FC-211-LED

LED Medium Full Cut-Off Wall Pack Series with Multi Lumen Multi CCT

up to 70 Wattage / up to 10000 Lumens

Catalog Number:	
Project Name:	
Note:	Type:



**EASY 3 COLORS
SELECTOR**
3000K • 4000K • 5000K



APPLICATIONS:

This rugged medium size full cut-off LED wall pack provides long lasting, energy efficient lighting with a variety of options to customize fixture performance to the required task. Easily mounts to building and is ideal for industrial, educational, multi-family, institutional, and government applications.



FEATURES:

- Full cut-off and compliance to Dark Sky requirement
- Lumen output from 4000 - 10000lm with efficacy up to 150lm/W
- 28W-70W power consumption, to replace 100W MH and 175W MH
- Optional Motion sensor and Photocell
- Optional battery back-up option for emergency egress lighting
- Type III polycarbonate optical lens with integrated lens
- Operating temperature is -40°C to 50°C (-40°F to 122°F)
- Dimmable
- UL/cUL wet location

DIMENSION:

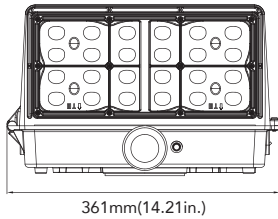

PHOTOMETRICS:

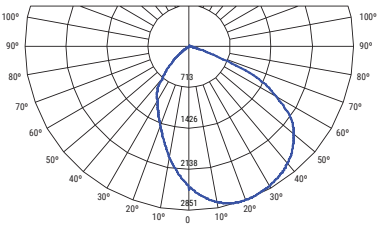

SPECIFICATIONS:

LUMENS	4000/6000/8000/10000 lumens
WATTAGE	28W/42W/56W/70W
CCT	30K/40K/50K
CRI	80
LIGHT EFFICIENCY	150 lumens/watt
VOLTAGE	120-277 VAC
POWER FREQUENCY	50/60 Hz
FINISH	Bronze
APPLICABLE ENVIRONMENT	Dry/Damp/Wet location
WORKING TEMPERATURE	-40°C to 50°C

B	U	G
2	1	1



Ordering Guide > Example: **OWP-FC-211-LED-4000/6000/8000/10000L-DIM10-MVOLT-30K/40K/50K-BZ**

OWP-FC-211-LED							
SERIES	PERFORMANCE	DIMMING	VOLTAGE	CCT	FINISH	EMERGENCY	ACCESSORIES
OWP-FC-211-LED	4000/6000/8000/10000 L	DIM10 - 0-10V Dimming	MVOLT - 120-277V	30K/40K/50K	BZ - Bronze	O-EMG-LED	WPPHC - Photocell WPMS - Motion Sensor FSP-311 - High/Low PIR Fixture Mount Sensor Line Voltage

* For more options, consult factory



Submittal form is available @ www.oraclelighting.com
Tel: 323-888-1973 • Fax: 323-888-1977

Specifications and Dimensions subject to change without notice.

Issued-230621