




MULTILUMEN SELECTOR EASY 5 COLORS **SELECCTOR**



DIMENSIONS

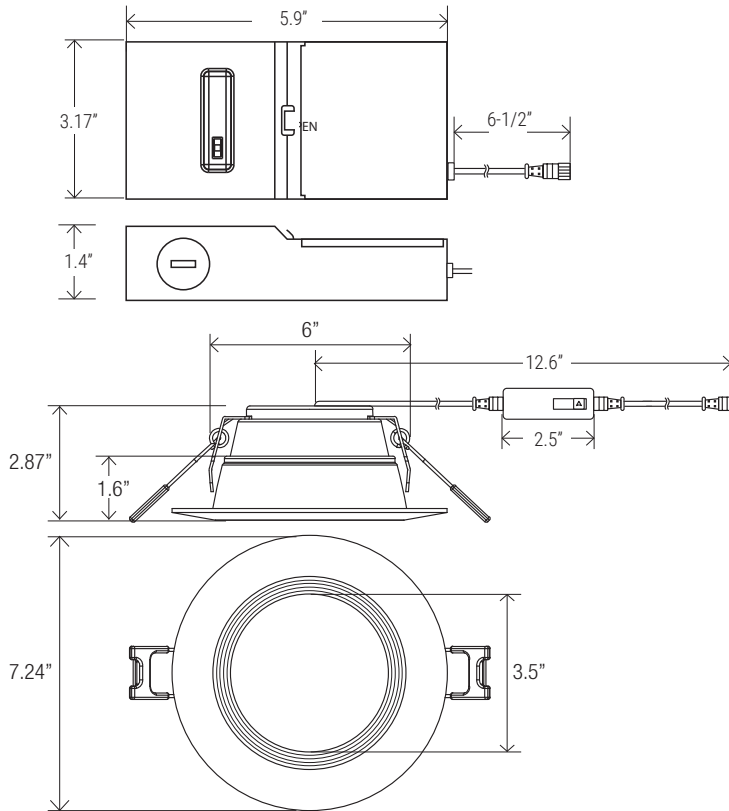

NOMINAL LUMENS	DELIVERED LUMENS	WATTAGES
1200	1195	15W
1000	975	12W
800	781	9W

Based on 4000K, 90+ CRI. Actual wattage may vary +/- 5%

INSTALLATION

Cut hole in ceiling. Insert luminaire into opening by squeezing spring clips on both sides of luminaire. The width in ceiling needed for the driver to fit is 3".

You MUST seal all gaps between the ceiling and fixture with weatherproof silicone sealant. This deters moisture and water from damaging fixtures and other mechanical ceiling elements.

Max ceiling thickness 1.5"

FEATURE

The LED 6" round baffle multi-Lumen/CCT "Canless Downlight" engineered for new construction, remodel, or retrofit to accommodate insulated or dropped ceilings. Easily access field-adjustable 3-Lumens and 5-Color SeleCCTOR switch by lowering the luminaire from the opening. Recessed housing not required, especially with limited plenum applications. Remote driver allows easy installation and maintenance. Small aperture and shallow depth are ideal for unlimited applications.


LUMENS	800L/1000L/1200L
CCT	27K/30K/35K/40K/50K
CRI	90
COLOR QUALITY	3-Step MacAdam Ellipse
TRIM	Baffle Trim
REFLECTOR COLOR	W (White)
FLANGE COLOR	WH (White)
DIMMING	DIMTR (Triac Dimming), DIM10 (0-10V Dimming)
EMERGENCY	16W high voltage inverter (remote)
LIFETIME	L70 at 50,000 Hours
PHOTOMETRIC TESTS	In Accordance with IES LM79-08, LM80 and TM-30, TM-21

- Aluminum Housing
- PC Lens
- Input Voltage: 120V and 120-277V
- 10%-100% Dimming
- Working temperature: 0°F - 104°F
- Energy Star, ETL and Title 24 Compliance.
- The Elite LED lighting system carries a five-year carefree warranty for parts and components. (Labor not included)

BAFFLES



REL637-BT-SN-SN



REL637-BT-P-BK



REL637-BT-DBZ-DBZ

REFLECTORS



REL637-RT-CL-WH



REL637-RT-DBZ-DBZ



REL637-RT-MB-BK



REL637-RT-SN-SN



REL-RT-SHZ-WH



REL637-RT-PW-PW



TRIM



LUMEN SELECTOR: 800L/1000L/1200L



**CCT SELECTOR:
27K/30K/35K/40K/50K**



EXAMPLE: RPL637-800L/1000L/1200L-DIMTR/120-DIM10/MVOLT-27K/30K/35K/40K/50K-90-W-WH

TYPE	LUMEN	CCT	CRI	FINISH
RPL637	800L/1000L/1200L-DIMTR/120-DIM10/MVOLT	27K/30K/35K/40K/50K	90	W-WH (White)

TRIM RING ACCESSORIES

BAFFLE	SMOOTH REFLECTOR
REL637-BT-SN-SN REL637-BT-P-BK REL637-BT-DBZ-DBZ	REL637-RT-CL-WH REL637-RT-DBZ-DBZ REL637-RT-MB-BK
	REL637-RT-SN-SN REL637-RT-SHZ-WH REL637-RT-PW-PW

ACCESSORIES




RL-ACC-SLIM-1-10F
10-ft long extension





RL-ACC-SLIM-1-20F
20-ft long extension



RL-UNV-4/5/6
For use with: 4", 5", 6"
Universal mounting plate

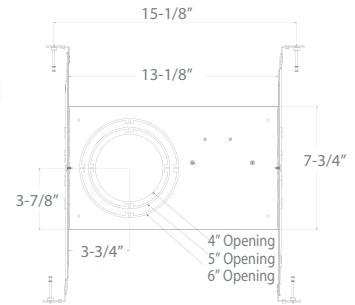

AL-ACC-SLIM-6-F-ROUGHPLATE
For use with: 6" downlights

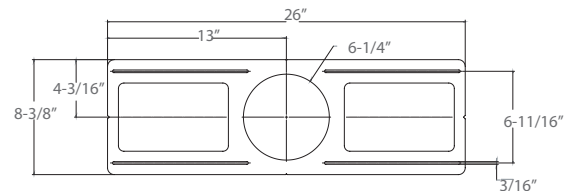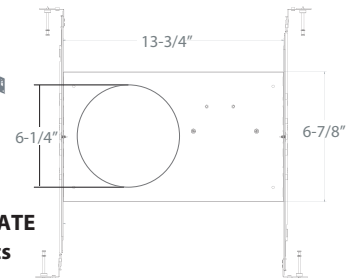

RL-ACC-SLIM-6-ROUGHPLATE
Rough-in plate for use with 6" downlights

EXAMPLE: RL-ACC-SLIM-1-10F

ACCESSORIES (Not Included)

RL-ACC-SLIM-1-10F - 10ft Long Extension
RL-ACC-SLIM-1-20F - 20ft Long Extension
RL-UNV-4/5/6 - Universal Mounting Plate for 4", 5" and 6"
RL-ACC-SLIM-6-ROUGHPLATE - 6" Mounting Plate
AL-ACC-SLIM-6-F-ROUGHPLATE - 6" Flanged Roughplate

TEST NO.: **EL08142327**

SPACING CRITERIA: **1.11**

MOUNTING HEIGHT	FC AT BEAM CENTER	BEAM DIA. 0°-180°	BEAM DIA. 90°-270°	20%																			0%
				80%				70%				50%				30%				10%			0%
				70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%		
				pw																		0%	
6.0 ft	15.9 fc	11.2 ft	11.3 ft	0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	
8.0 ft	9.0 fc	15.0 ft	15.1 ft	1	111	108	104	101	109	105	102	100	101	99	97	97	95	94	94	92	91	89	
10.0 ft	5.7 fc	18.7 ft	18.8 ft	2	103	97	91	87	101	95	90	86	92	87	84	88	85	82	86	83	80	78	
12.0 ft	4.0 fc	22.5 ft	22.6 ft	3	96	87	81	75	94	86	80	75	83	78	73	80	76	72	78	74	71	69	
14.0 ft	2.9 fc	26.2 ft	26.4 ft	4	89	79	72	66	87	78	71	65	75	69	65	73	68	64	71	67	63	61	
16.0 ft	2.2 fc	30.0 ft	30.2 ft	5	83	72	64	58	81	71	63	58	69	62	57	67	61	57	65	60	56	55	
18.0 ft	1.8 fc	33.7 ft	33.9 ft	6	77	66	58	52	75	65	57	52	63	56	52	61	56	51	60	55	51	49	
20.0 ft	1.4 fc	37.5 ft	37.7 ft	7	72	60	52	47	70	59	52	47	58	51	46	57	51	46	55	50	46	44	
				8	67	55	48	43	66	55	47	42	53	47	42	52	46	42	51	46	42	40	
				9	63	51	44	39	62	51	44	39	50	43	39	49	43	38	48	42	38	37	
				10	60	48	40	36	58	47	40	35	46	40	35	45	39	35	44	39	35	33	

TEST NO.: **EL08142327**

SPACING CRITERIA: **1.11**

MOUNTING HEIGHT	FC AT BEAM DIA. 0°-180° CENTER	BEAM DIA. 90°-270°	20%																			0%
			80%				70%				50%				30%				10%			0%
			pc	pw	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
			pw	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%
			0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	
6.0 ft	19.2 fc	11.3 ft	1	111	108	104	101	109	105	102	100	101	99	97	97	95	94	94	92	91	89	
8.0 ft	10.8 fc	15.1 ft	2	103	97	91	87	101	95	90	86	92	87	84	88	85	82	86	83	80	78	
10.0 ft	6.9 fc	18.8 ft	3	96	87	81	75	94	86	80	75	83	78	73	80	76	72	78	74	71	69	
12.0 ft	4.8 fc	22.6 ft	4	89	79	72	66	87	78	71	66	75	69	65	73	68	64	71	67	63	61	
14.0 ft	3.5 fc	26.4 ft	5	83	72	64	58	81	71	63	58	69	62	58	67	61	57	65	60	56	55	
16.0 ft	2.7 fc	30.1 ft	6	77	66	58	52	75	65	57	52	63	56	52	61	56	51	60	55	51	49	
18.0 ft	2.1 fc	33.9 ft	7	72	60	52	47	70	59	52	47	58	51	46	57	51	46	55	50	46	44	
20.0 ft	1.7 fc	37.7 ft	8	67	55	48	43	66	55	47	42	53	47	42	52	46	42	51	46	42	40	
			9	63	51	44	39	62	51	44	39	50	43	39	49	43	38	48	42	38	37	
			10	60	48	40	36	58	47	40	36	46	40	35	45	39	35	44	39	35	34	

TEST NO.: **EL08142327**

SPACING CRITERIA: **1.10**

MOUNTING HEIGHT	FC AT BEAM CENTER	BEAM DIA. 0°-180°	BEAM DIA. 90°-270°	20%																			0%
				80%				70%				50%				30%				10%			0%
				pc	pw	70%	50%	30%	10%	70%	50%	30%	10%	50%	30%	10%	50%	30%	10%	50%	30%	10%	0%
				0	119	119	119	119	116	116	116	116	111	111	111	106	106	106	102	102	102	100	
6.0 ft	12.7 fc	11.3 ft	11.3 ft	1	111	108	104	101	109	105	102	100	101	99	97	97	95	94	94	92	91	89	
8.0 ft	7.2 fc	15.1 ft	15.1 ft	2	103	97	91	87	101	95	90	86	92	87	84	88	85	82	85	83	80	78	
10.0 ft	4.6 fc	18.9 ft	18.9 ft	3	96	87	81	75	94	86	80	75	83	78	73	80	76	72	78	74	71	69	
12.0 ft	3.2 fc	22.7 ft	22.7 ft	4	89	79	72	66	87	78	71	65	75	69	65	73	68	64	71	67	63	61	
14.0 ft	2.3 fc	26.4 ft	26.5 ft	5	83	72	64	58	81	71	63	58	69	62	57	67	61	57	65	60	56	54	
16.0 ft	1.8 fc	30.2 ft	30.3 ft	6	77	65	58	52	75	65	57	52	63	56	51	61	56	51	60	55	51	49	
18.0 ft	1.4 fc	34.0 ft	34.0 ft	7	72	60	52	47	70	59	52	47	58	51	46	56	51	46	55	50	46	44	
20.0 ft	1.1 fc	37.8 ft	37.8 ft	8	67	55	48	42	66	55	47	42	53	47	42	52	46	42	51	46	42	40	
				9	63	51	44	39	62	51	44	39	50	43	38	49	43	38	48	42	38	36	
				10	60	48	40	36	58	47	40	35	46	40	35	45	39	35	44	39	35	33	