

PROJECT:

SCHEDULE:

DATE:

PREPARE BY:

NOTES:

DESCRIPTION

naturaLED® security wall lighting are suitable for wet locations with ratings of IP65. Built-in dusk to dawn photocell sensor, with easy on/off plug if sensor is not in use. Easy installation, gasketing between back plate and front prevents entry of water. Polyester powder-coated finish, rust and corrosion proof, maintenance free throughout the years of usage.


APPLICATIONS

Security, Pathway, Perimeter, Area, Wall Lighting



FEATURES

- DLC Premium
- IP65 Rated
- UL Listed
- ColorTemp: 4000K, 5000K
- Voltage: 120-277V
- Power Factor: >0.9
- Beam Angle: 100°
- Dimmable: 0-10V
- CRI: >80
- Operating temperature: - 4°F - 113°F
- Built-in photocell sensor (turn on and off)
- Lightweight
- Recommended 8-foot height performance
- Material: Aluminum Housing with PC lens
- Color: Bronze
- 5 Year Warranty

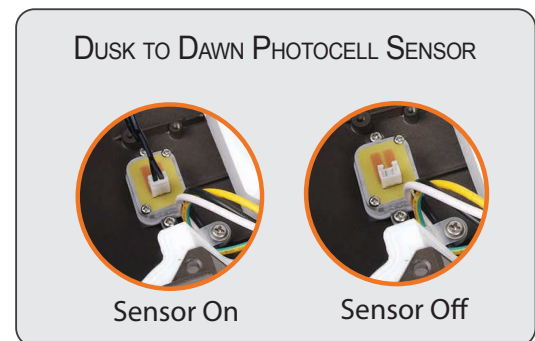

SAMPLE NUMBER		FXSECW15/840/DB/MV			
FAMILY	SERIES	WATTAGE	CRI/COLOR TEMP	COLOR	VOLTAGE
FX	SECW	15	840	DB	MV
Fixture	Security Wall Light	15 Watt	CRI 80 4000K	Dark Bronze	Multiple Voltage



SECURITY WALL LIGHTS
WALL & SECURITY LUMINAIRES


ORDERING

*P= Premium DLC / *S = Standard DLC

Watts (W)	Ordering Code	Description	CCT (K)	Lumens (Lm)	Equiv. Wattage (W)	Included	IP65 Rated	DLC (S/P)
15	9410	FXSECW15/840/DB/MV	4000K	2,024	70	Photocell	●	P
15	9411	FXSECW15/850/DB/MV	5000K	2,027	70	Photocell	●	P
29	9412	FXSECW30/840/DB/MV	4000K	3,933	100	Photocell	●	P
29	9413	FXSECW30/850/DB/MV	5000K	3,949	100	Photocell	●	P

DIMENSIONS


15W / 30W
1.98-lbs

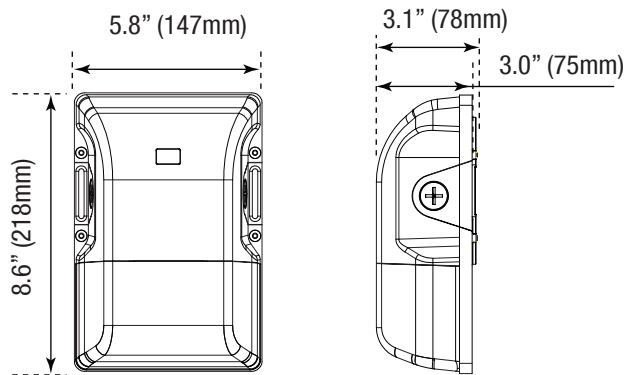

PHOTOMETRICS CHART

PACKAGE


15 Watt
DLC Premium



Center Beam fc	Beam Width
15.4 fc	13.3 ft 14.0 ft
3.91 fc	26.4 ft 27.9 ft
1.73 fc	39.7 ft 41.9 ft
0.97 fc	53.0 ft 56.0 ft
0.62 fc	66.1 ft 69.8 ft
0.43 fc	79.4 ft 83.9 ft

■ Vert. Spread: 89.5°
■ Horiz. Spread: 92.7°

30 Watt
DLC Premium



Center Beam fc	Beam Width
29.0 fc	14.4 ft 16.5 ft
7.36 fc	28.6 ft 32.8 ft
3.26 fc	43.0 ft 49.3 ft
1.83 fc	57.5 ft 65.8 ft
1.17 fc	71.7 ft 82.1 ft
0.81 fc	86.1 ft 98.6 ft

■ Vert. Spread: 94.2°
■ Horiz. Spread: 101.9°

Case Qty 10 pcs

